




OMAHA

Instructions For Preassembled MECO OMAHA ROLL-OUT SHELF RACKS

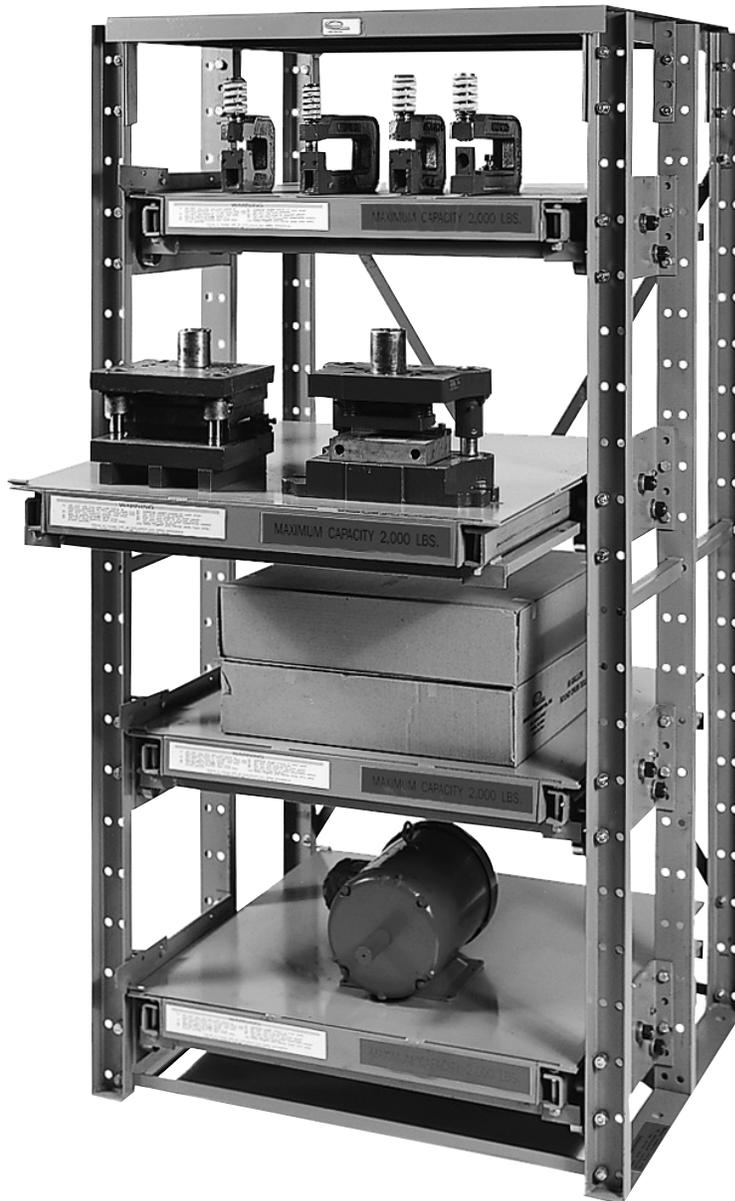

MODERN EQUIPMENT COMPANY

6161 ABBOTT DRIVE, OMAHA, NE 68110

www.meco-omaha.com

1-800-228-7334

ROLL-OUT STORAGE RACK


READ ALL INSTRUCTIONS & SAFETY PRECAUTIONS FIRST. FOLLOW INSTRUCTIONS CAREFULLY, IN SEQUENCE. USE LOCK WASHERS ON ALL BOLTS; LEAVE BOLTS FINGER-TIGHT UNTIL STEP 5 OF ASSEMBLY.

WARNING:

FAILURE TO COMPLY WITH ALL INSTRUCTIONS & SAFETY PRECAUTIONS MAY RESULT IN PROPERTY DAMAGE AND/OR PERSONAL INJURY.

SAFETY PRECAUTIONS

1. DO NOT USE THIS UNIT UNTIL IT IS SECURELY ANCHORED TO THE FLOOR AND LEVEL.
2. DO NOT USE SHELVES UNTIL PROPERLY INSTALLED.
3. EXTEND ONLY ONE SHELF AT A TIME.
4. DO NOT LOAD SHELVES WITH MORE THAN 2,000 LBS.
5. DISTRIBUTE WEIGHT EVENLY ON EACH SHELF.
6. DO NOT STAND ON SHELVES.
7. DO NOT USE SHELF AS A WORKBENCH.
8. IN USE, PULL TRACK ASSEMBLY OUT FIRST, THEN SHELF.
9. PULL OUT AND PUSH IN SHELVES SLOWLY.
10. KEEP FINGERS & HANDS OUT OF TRACKS.

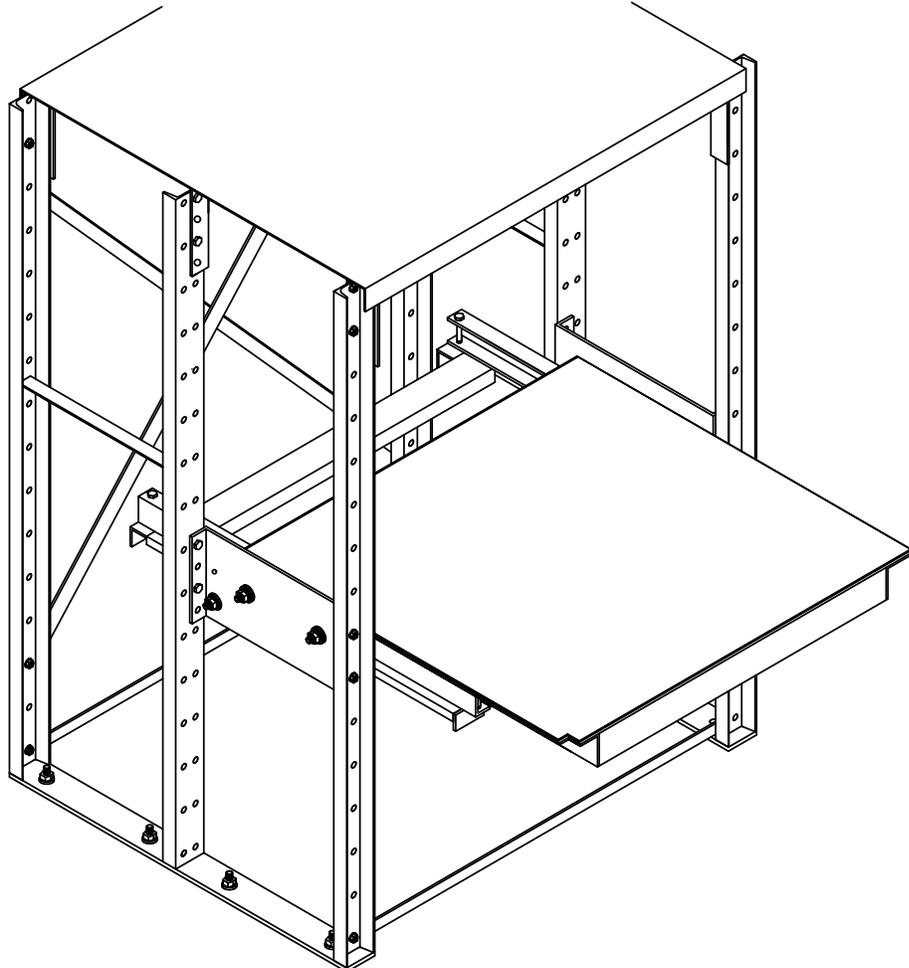


ROLL-OUT STORAGE RACK

ASSEMBLY INSTRUCTIONS

STEP 1:

ATTACH TOP TO FRAMES USING (10) 1/2 X 1 BOLTS, NUTS & LOCK WASHERS. FINGER TIGHTEN ONLY AT THIS TIME.

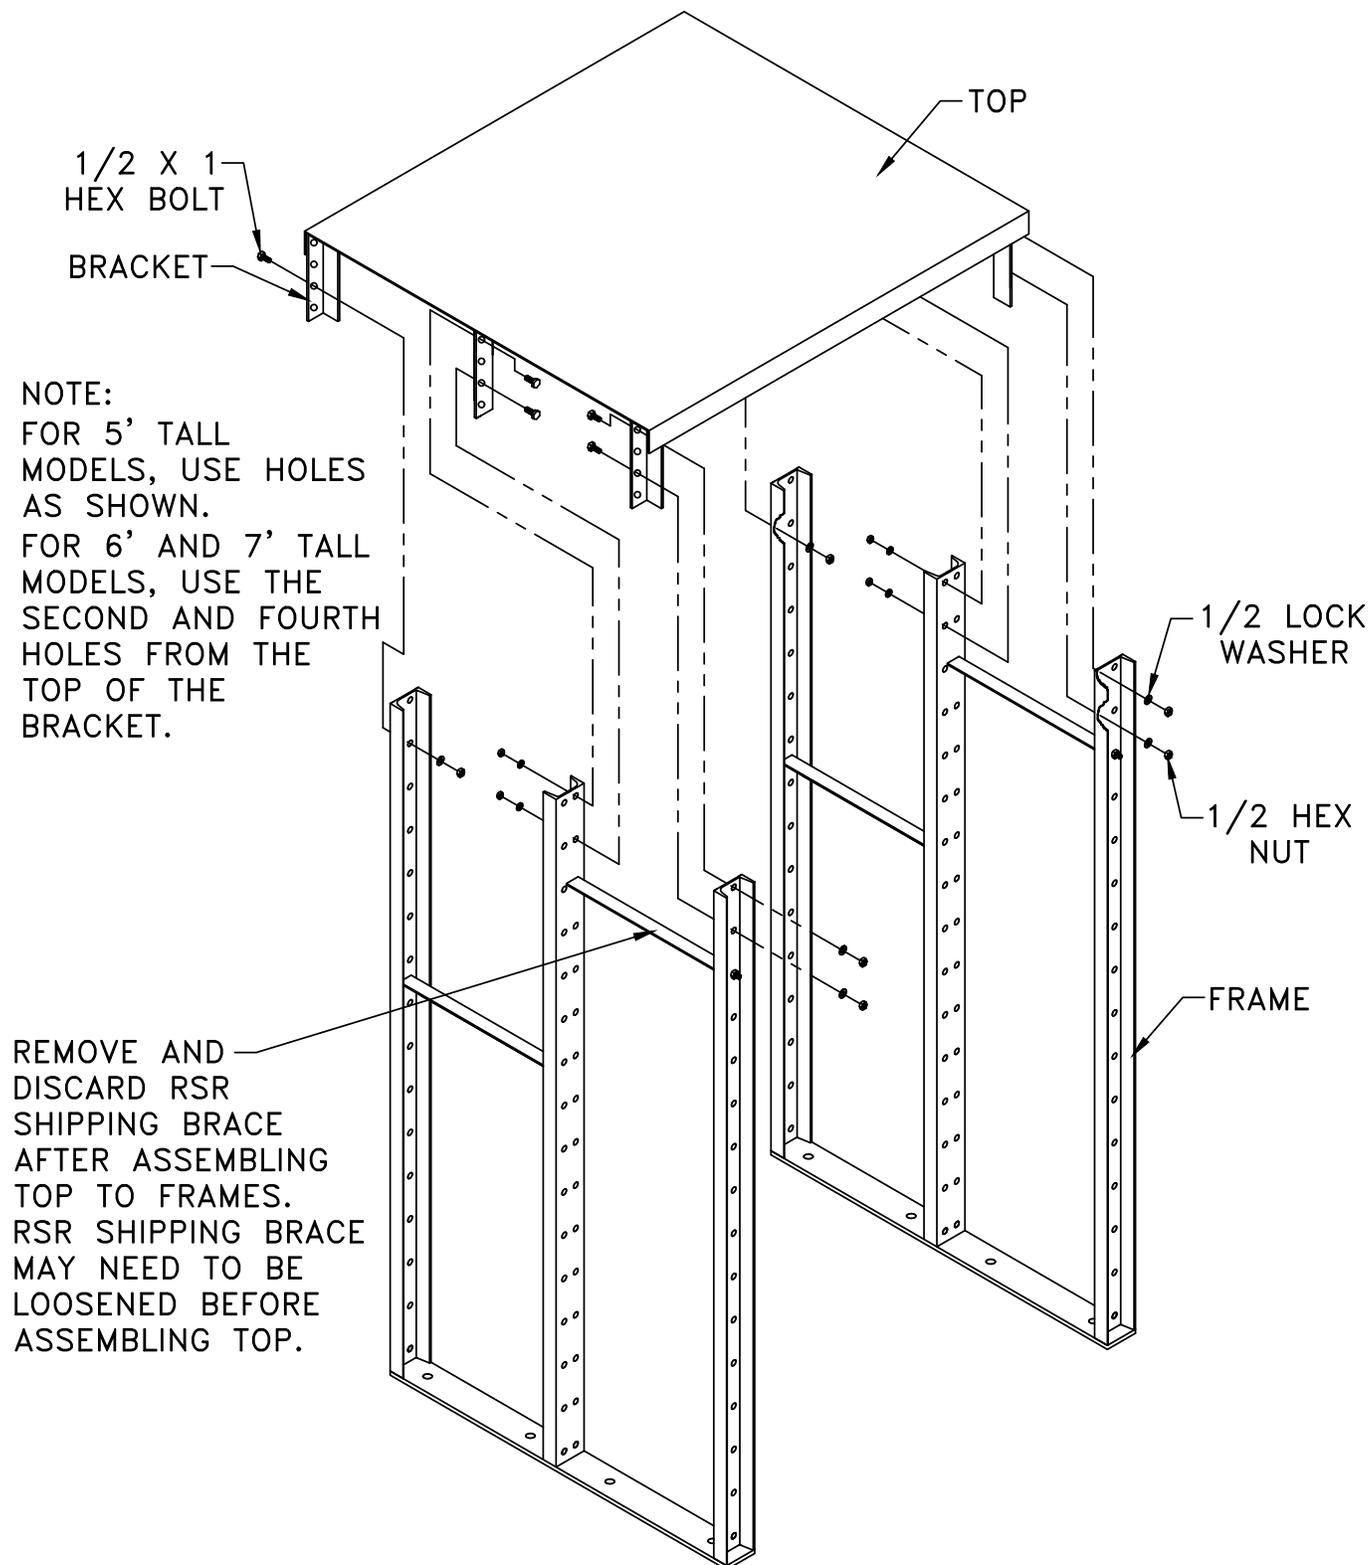

NOTE:

FOR 5' TALL MODELS, USE HOLES AS SHOWN.
FOR 6' AND 7' TALL MODELS, USE THE SECOND AND FOURTH HOLES FROM THE TOP OF THE BRACKET.



REMOVE AND DISCARD RSR SHIPPING BRACE AFTER ASSEMBLING TOP TO FRAMES. RSR SHIPPING BRACE MAY NEED TO BE LOOSENED BEFORE ASSEMBLING TOP.

ROLL-OUT STORAGE RACK

ASSEMBLY INSTRUCTIONS

STEP 2:

ATTACH X-BRACES USING (4) 1/2 X 1 BOLTS, NUTS & LOCK WASHERS. X-BRACES ATTACH TO THE THIRD HOLE FROM THE BOTTOM AND THE THIRD HOLE FROM THE TOP OF THE FRAME. FINGER TIGHTEN ONLY AT THIS TIME.

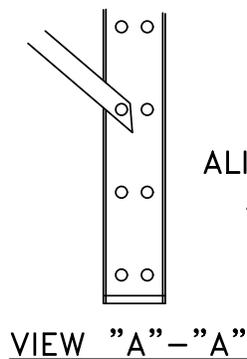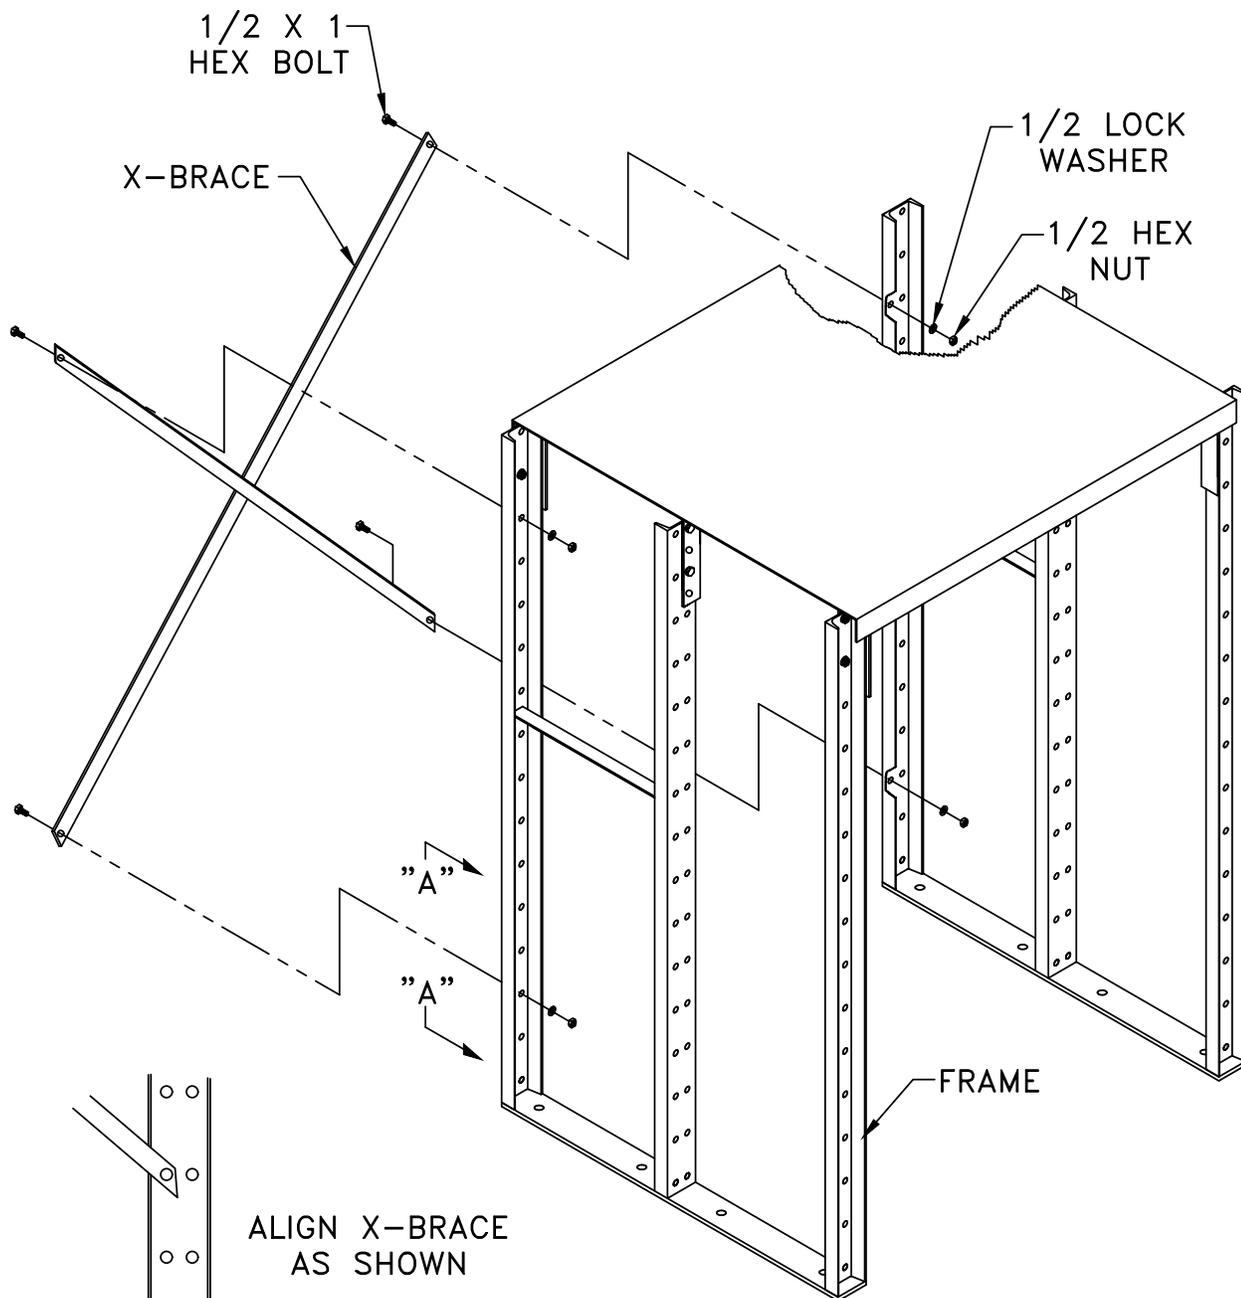

ROLL-OUT STORAGE RACK


ASSEMBLY INSTRUCTIONS

STEP 4:

ATTACH SHELF BRACKETS AT DESIRED SHELF HEIGHTS USING (4)
1/2 X 1 BOLTS, NUTS & LOCK WASHERS PER SHELF BRACKET.

SHELF BRACKETS NEED TO BE ORIENTATED AS SHOWN.

NOTE: THE LEFT SHELF BRACKET HAS THE SPRING LOCK ATTACHED.
FINGER TIGHTEN ONLY AT THIS TIME.

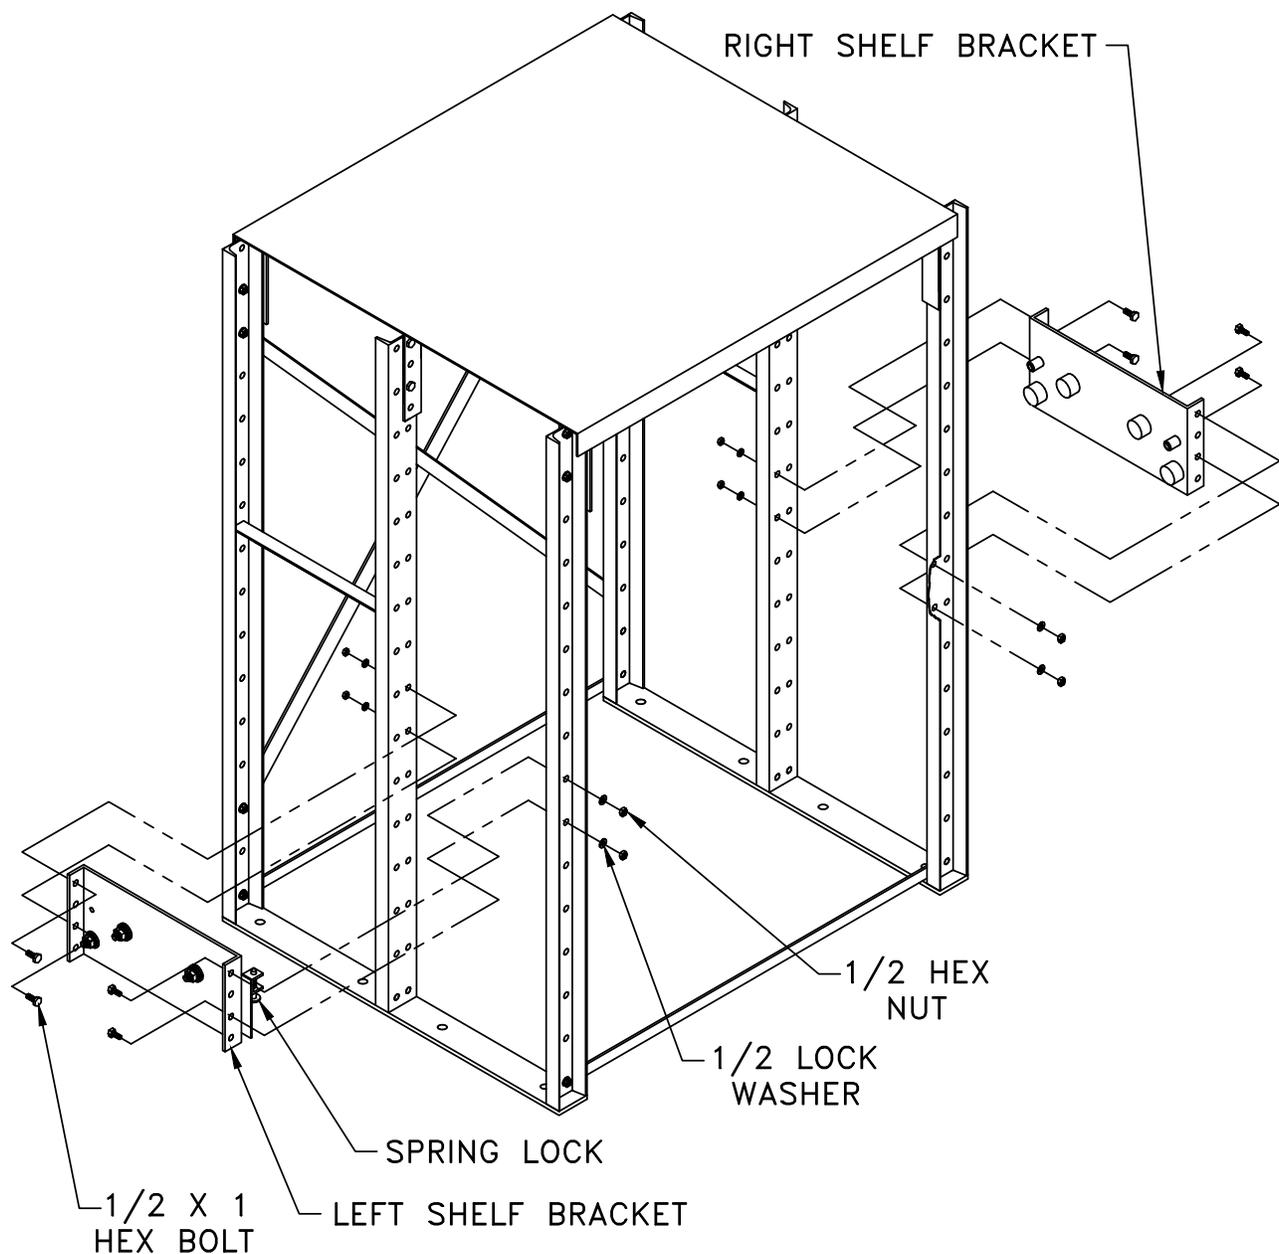


ROLL-OUT STORAGE RACK

ASSEMBLY INSTRUCTIONS


STEP 5:

MAKE SURE RACK ASSEMBLY IS LEVEL AND SQUARE.
FOR PRODUCT TO BE SQUARE: "A" DIMS SHOULD BE EQUAL, "B"
DIMS SHOULD BE EQUAL, ETC. THEN TORQUE ALL 1/2 X 1 BOLTS
TO 110 FT-LBS MAXIMUM.

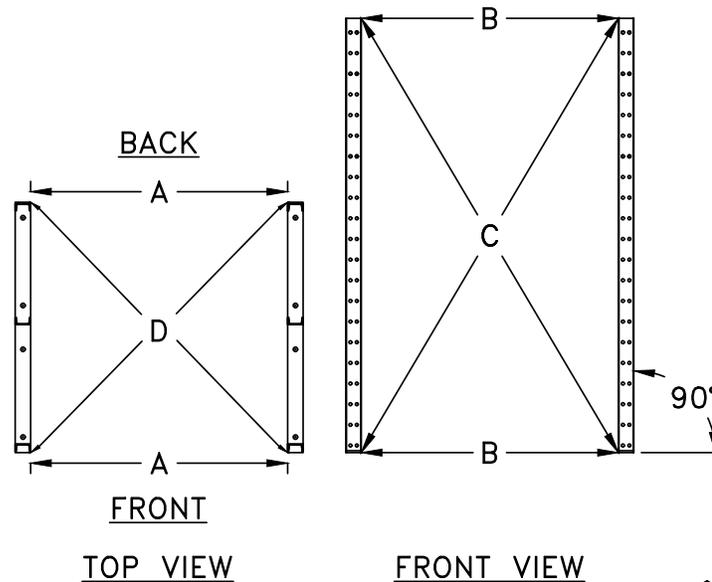

STEP 6:

ANCHOR UNIT TO FLOOR WITH MINIMUM (8)
3/4 INCH ANCHORS (NOT SUPPLIED BY MECO)
WITH 3-1/4 INCH MINIMUM EMBEDMENT
DEPTH REQUIRED. EXACT LENGTH OF ANCHOR
IS DEPENDENT ON LOCAL BUILDING CODES. IT
IS THE RESPONSIBILITY OF THE CUSTOMER TO
ENSURE COMPLIANCE WITH ALL RELEVANT
REGULATIONS.

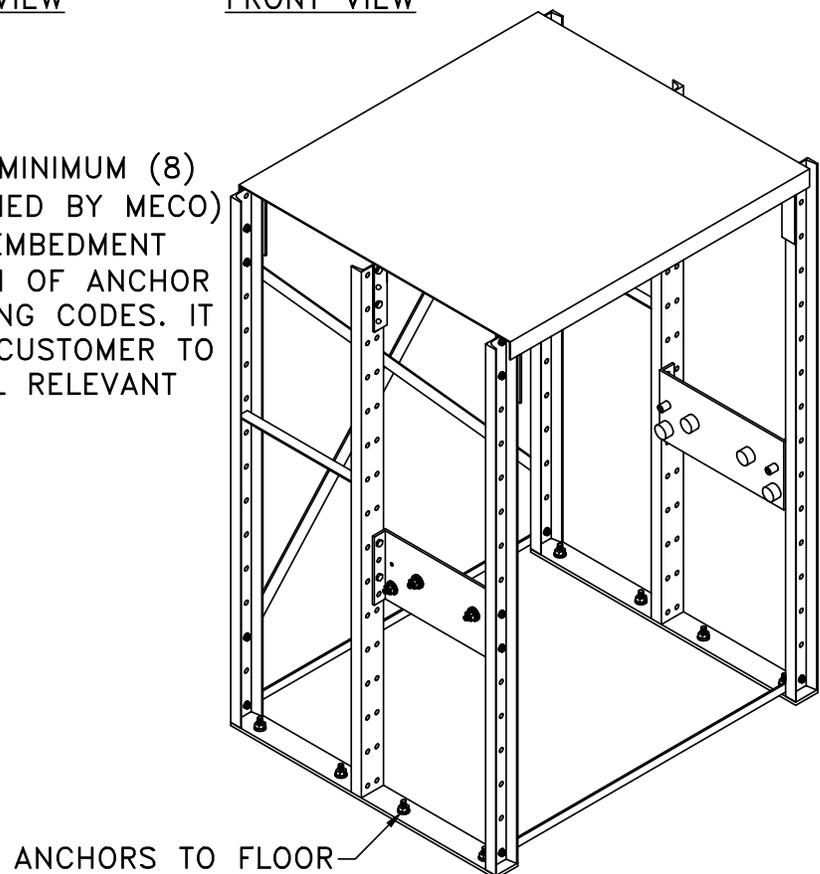

ROLL-OUT STORAGE RACK

ASSEMBLY INSTRUCTIONS


STEP 7:

FIRST, REMOVE BOTH REAR STOP TABS FROM THE SHELF ASSEMBLY. SLIDE THE SHELF ASSEMBLY ONTO THE ROLLERS AND REATTACH THE REAR STOP TABS.

SECOND, REMOVE THE ORANGE FRONT STOP TAB FROM THE SHELF ASSEMBLY AND DISCARD (NOT DEPICTED).

CAUTION:

ONCE THE FRONT STOP TAB IS REMOVED, THE SHELF MAY OPEN UNEXPECTEDLY. BE SURE THE SHELF IS IN THE LOCKED POSITION AFTER REMOVING THE FRONT STOP TAB.

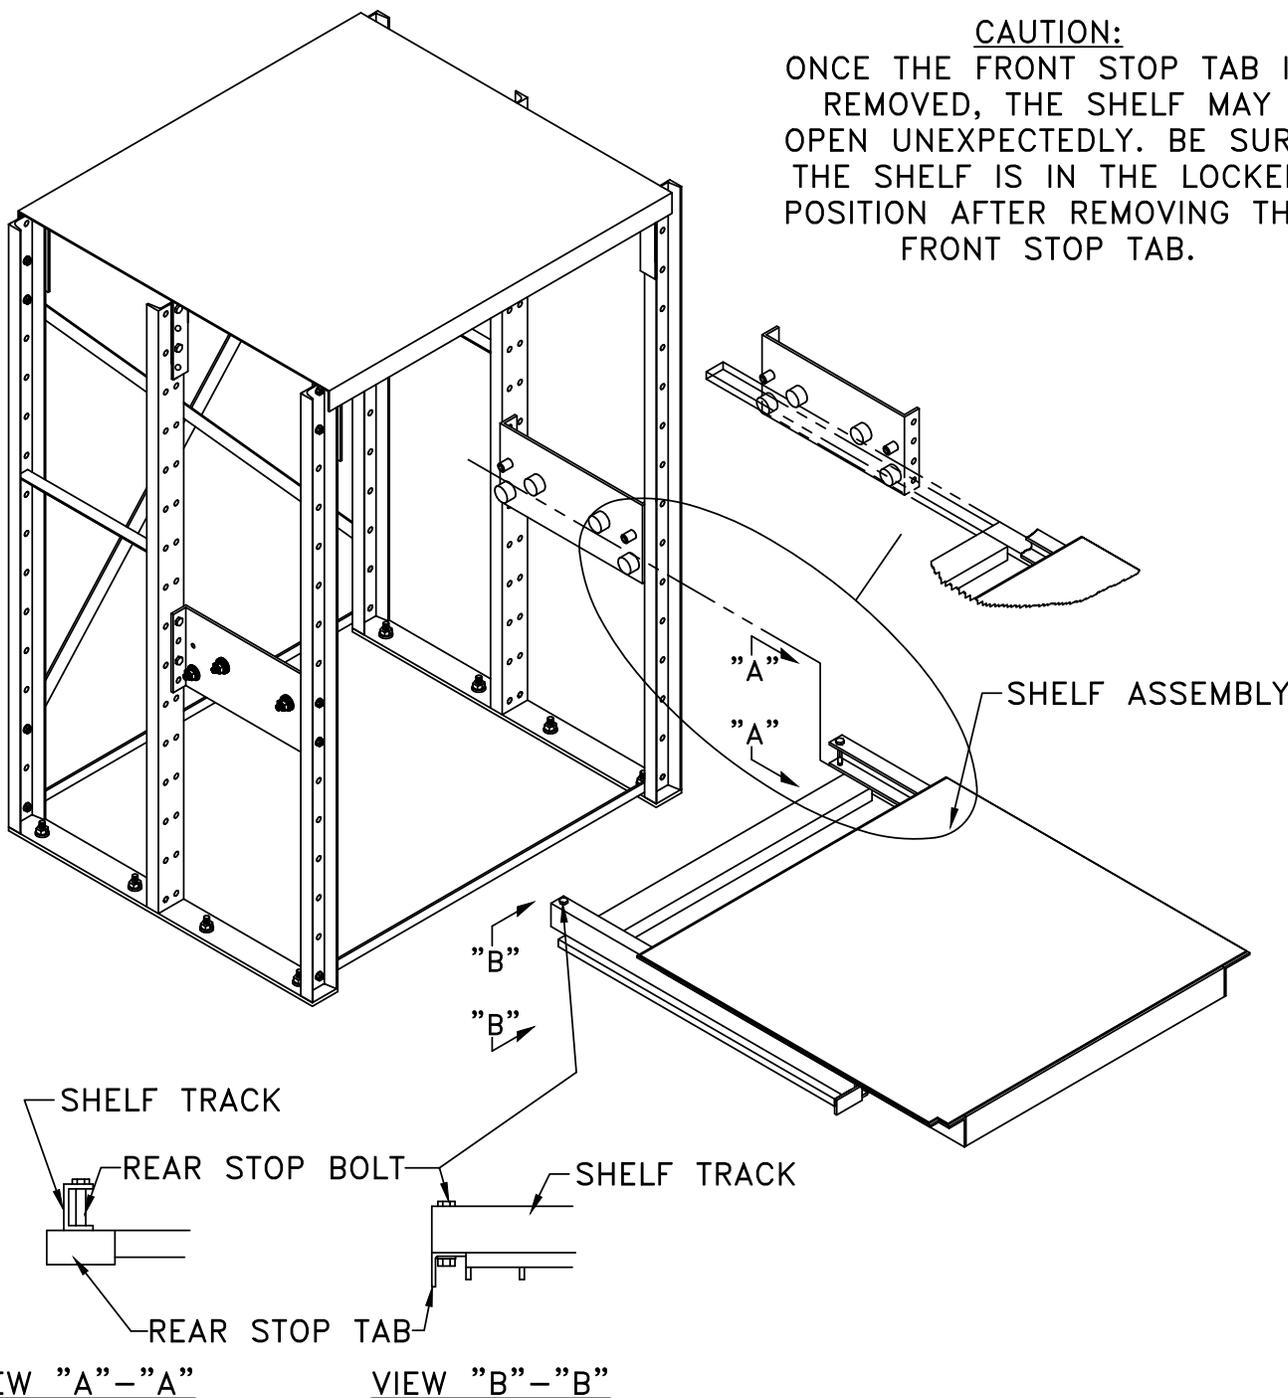

ROLL-OUT STORAGE RACK

ASSEMBLY INSTRUCTIONS

STEP 8:

EXTEND AND RETRACT EACH SHELF, ONE AT A TIME. IF A SHELF IS TOO TIGHT, ADJUST THE SHELF BRACKETS OUTWARD. IF A SHELF IS TOO LOOSE, ADJUST THE SHELF BRACKETS INWARD. THE SHELF BRACKETS SHOULD BE PLACED SO THAT THE BALL ROLLERS MAKE CONTACT WITH THE TRACK ASSEMBLY AND SHELF ROLLS FREELY (SEE DETAIL "A").

REPEAT STEPS 7 AND 8 FOR EACH SHELF.

