

Anti-Static & Non-Conductive



ApacheStat
Soft Foot

Conductive
Diamond Foot

Conductive
Diamond Runner

Switchboard
Diamond Deckplate

Switchboard
Smooth

Switchboard
Corrugated



Comfortably Safe

Apache's Anti-Static matting for sensitive electronic areas is designed to protect operators and components from the effects of static charges.

Distributed by:
Custom Equipment Company
866-333-0728
sales@custommhs.com
www.custommhs.com



ApacheStat™ Soft Foot

3"
8
THICK

Static-dissipative anti-fatigue mat with beveled edges for increased safety.

Recommended Uses:

Industrial work stations receptive to static electricity.

Standard Mat Sizes:

Nominal	Metric*
2' x 3'	61 x 91 cm
3' x 5'	91 x 152 cm

Standard Roll Sizes:


Nominal	Metric*
2' x 60'	61 x 1829 cm
3' x 60'	91 x 1829 cm

*Metric based on nominal size

Custom Sizes:

2', 3' and 4' widths up to 60' length

Apache Spec. #500

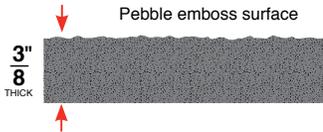

Gray

15' Grounding Cord (optional)

- Connects all ESD matting to a building's electrical ground through a snap placed on the corner of the mats.
- One MegaOhm resistor floor mat dome cap



- Ergonomic anti-fatigue mat provides comfort and relief for aching feet and legs.
- RTT – $10^8 - 10^9$ ohms. RTG – $10^8 - 10^9$ ohms
- Can easily be cut to fit any work area
- Upon request, snaps will be installed on all standard mats.



Conductive Diamond Foot™ matting is perfect for electrically receptive workstations like electronics and computer testing



Conductive Diamond Foot™

9"
16
THICK

Durable and long lasting static dissipative anti-fatigue matting provides comfort and relief for aching feet and legs.

Recommended Uses:

Industrial work stations receptive to static electricity.

Standard Mat Sizes:

Nominal	Metric*
2' x 3'	61 x 91 cm
3' x 5'	91 x 152 cm
3' x 10'	91 x 305 cm

Standard Roll Sizes:


Nominal	Metric*
3' x 75'	91 x 2286 cm
4' x 75'	121 x 2286 cm

*Metric based on nominal size

Custom Sizes:

3' and 4' widths up to 75' length

Apache Spec. #600



Black

- Conductive diamond surface removes static electricity from workers and preventing damage to sensitive electronic equipment and systems.
- Durable vinyl surface bonded to resilient anti-fatigue closed-cell vinyl foam with beveled edges.
- RTT – $10^4 - 10^5$ ohms. RTG – $10^4 - 10^5$ ohms.
- Snap installed on all standard mats if requested.
- Ask for custom configurations.

Anti-Static & Non-Conductive Runners

5"
THICK

Conductive Diamond Runner

Durable and long lasting static dissipative matting.

Recommended Uses:

Industrial work stations receptive to static electricity.

Standard Roll Sizes: 

Nominal	Metric*
3' x 75'	91 x 2286 cm
4' x 75'	121 x 2286 cm

*Metric based on nominal size


Custom Sizes: 

3' and 4' widths up to 75' length

Apache Spec. #605



Black



- Conductive diamond surface removes static electricity from workers and prevents damage to sensitive electronic equipment and systems.
- Durable vinyl surface with slip-resistant diamond pattern.
- RTT – $10^4 - 10^5$ ohms. RTG – $10^4 - 10^5$ ohms.
- Upon request, snaps will be installed on all standard mats.
- Ask for custom configurations.

3"
THICK

Switchboard Diamond Deckplate

Solid vinyl diamond surface runner provides great traction.

Recommended Uses:

Industrial work stations and aisles receptive to static electricity.

Standard Roll Sizes: 



Nominal	Metric*
3' x 75'	91 x 2286 cm

*Metric based on nominal size

Custom Sizes: 

3' widths up to 75' length

Apache Spec. #704

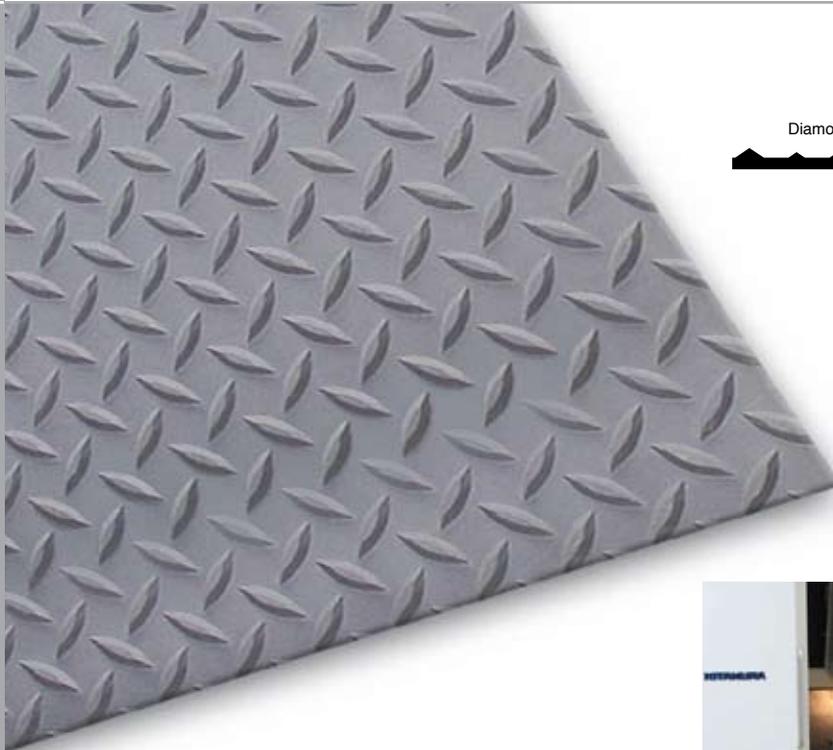


- Thick vinyl runner protects workers from high voltage equipment.
- Recommended maximum usage – 3,000 volts (VAC).
- Dielectric strength to 30,000 volts (VAC).
- MIL-DTL-15562-G Type 3.



Anti-Static & Non-Conductive Runners

Blue
(also available
in black by special order)

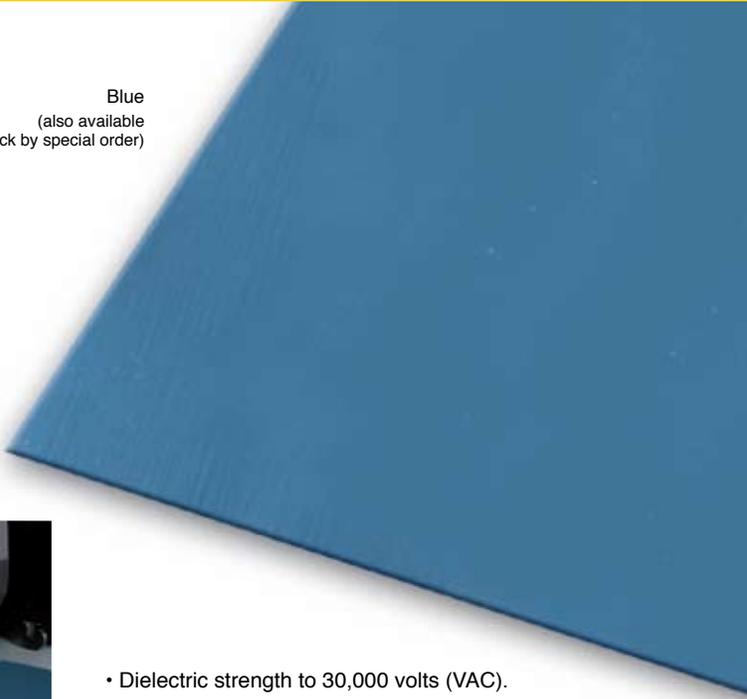

- Dielectric strength to 30,000 volts (VAC).
- Recommended maximum usage – 3,000 volts (VAC).
- MIL-DTL-15562-G Type 2.
- Easy to clean.

Switchboard Smooth

1"
8
THICK

Long lasting, smooth vinyl runner protects workers from high voltage equipment.

Recommended Uses:

Industrial work stations and aisles receptive to static electricity.

Standard Roll Sizes:


Nominal	Metric*
3' x 75'	91 x 2286 cm

*Metric based on nominal size

Custom Sizes:

3' widths up to 75' length

Apache Spec. #702



- Long lasting 1/4" thick construction.
- Protects workers from high voltage equipment.
- Recommended maximum usage – 17,000 volts (VAC).
- Dielectric strength to 30,000 volts (VAC).

Switchboard Corrugated

1"
4
THICK

Extra thick, vinyl runner with corrugated surface for added traction.

Recommended Uses:

High voltage work cells.

Standard Roll Sizes:

Nominal	Metric*
2' x 75'	61 x 2286 cm
3' x 75'	91 x 2286 cm
4' x 75'	122 x 2286 cm

*Metric based on nominal size

Custom Sizes:

2', 3' & 4' widths up to 75' length

Apache Spec. #700

Chemical Resistance Chart

Use this guide to assess the appropriate mat for your needs. Many corrosive agents can damage mats and floors. Proper care and planning can avoid problems and damage.

Product	Acetic Acid	Acetone	Animal Fats	Brake Fluid	Butyl Alcohol	Chlorine (wet)	Cutting Fluid	Cutting Fluid (water base)	Cutting Fluid (soluble oils)	Diesel Oil	Gasoline	MEK	Mineral Oil	Nitric Acid (dilute)	Sodium Hydroxide	Sulfuric Acid (dilute)	Toluene	Transmission Fluid	Trichloroethane	Vegetable Oil	Xylene
Eco Diamond Foot	2	2	3	3	2	2	2	4	4	3	4	3	4	1	3	4	3	4	3	4	
Comfort Zone	2	4	2	2	1	1	1	2	2	1	4	1	1	1	1	1	1	2	1	4	
Diamond Foot	1	4	2	2	2	2	2	3	3	2	4	2	1	2	1	1	3	3	2	4	
Supreme Diamond Foot	1	4	1	1	2	1	1	2	2	1	4	1	1	1	1	1	1	3	1	4	
Ultimate Diamond Foot	1	4	1	1	2	1	1	2	2	1	4	1	1	1	1	1	1	3	1	4	
Supreme SlipTech	1	4	2	2	2	2	2	3	2	2	4	2	1	2	1	2	3	3	3	4	
WeldMaster	2	2	3	3	2	2	2	4	4	3	4	3	4	1	3	4	3	4	3	4	
Marble Foot	1	4	2	2	2	3	2	4	3	3	4	3	2	2	2	3	3	4	2	4	
K-Marble Foot	2	4	3	2	2	3	2	3	3	2	4	2	1	2	1	2	3	3	2	4	
Ultimate K-Marble Foot	2	4	3	2	2	3	2	3	3	2	4	2	1	2	1	2	3	3	2	4	
Invigorator	2	4	3	2	3	3	2	3	3	3	4	3	1	2	2	2	3	3	3	4	
Armor-Step	2	4	2	2	1	1	1	2	2	1	4	1	1	1	1	1	1	2	1	4	
Ergo-Flex	1	4	1	2	4	2	1	2	3	1	4	1	2	1	2	1	1	3	1	4	
Bubble-Flex	2	2	3	2	2	2	1	2	3	3	4	2	4	1	2	4	2	4	3	4	
Soft Foot	2	4	2	2	3	3	2	3	2	1	4	2	1	2	1	2	2	3	1	4	
Safety Soft Foot (with DuraShield)	1	4	1	2	2	2	1	3	2	1	4	1	1	1	1	2	2	3	1	4	
Diamond Deluxe Soft Foot	2	4	2	2	3	3	2	3	2	1	4	2	1	2	1	2	2	2	1	4	
Supreme Soft Foot	2	4	2	2	3	3	2	3	2	1	4	2	1	2	1	2	2	2	1	4	
WorkStep (General Purpose Black)	4	4	3	4	3	4	3	4	4	4	4	3	4	3	4	4	3	4	2	4	
WorkStep (Grease-Resistant Red)	3	3	2	3	2	3	2	3	3	3	4	2	3	2	3	4	2	4	2	4	
TruTread (Grease-Resistant Black)	3	4	2	3	2	2	2	3	3	3	4	3	4	3	4	4	3	4	2	4	
TruTread (Grease-Proof Red)	2	3	1	2	1	2	2	2	2	2	4	1	3	1	3	4	2	4	1	4	
Safety TruTread (Grease-Resistant)	3	4	2	3	2	2	2	3	3	3	4	3	4	3	4	4	3	4	2	4	
Performa 100N (Grease-Proof)	2	2	1	1	2	3	2	2	2	1	4	2	3	1	3	4	2	4	1	4	
Performa (General Purpose Black)	4	2	3	3	2	4	3	3	4	4	4	3	4	3	4	4	3	4	2	4	
Performa (Grease Resistant Red)	3	3	2	2	2	3	2	3	3	2	4	2	3	1	3	4	2	4	1	4	
Performa SD (Grease-Resistant)	4	2	3	3	2	4	3	3	4	4	4	3	4	3	4	4	3	4	2	4	
Diamond Runner	1	4	1	1	2	1	1	2	2	1	4	1	1	1	1	1	1	3	1	4	
Tuff Foot Runner	2	4	3	2	3	3	2	3	3	3	4	3	1	2	2	2	3	3	3	4	
Counter-Tred	2	2	3	2	2	2	2	2	3	3	4	2	4	1	2	4	2	4	3	4	
Grid Step	2	3	2	2	2	2	1	2	3	2	4	2	2	2	2	2	2	3	1	4	
Apache Stat Soft Foot	2	4	2	2	3	3	2	3	2	1	4	2	1	2	1	2	2	2	1	4	
Conductive Diamond Foot	1	4	2	2	2	2	2	3	3	2	4	2	1	2	1	1	3	3	2	4	
Conductive Diamond Runner	1	4	1	1	2	1	1	2	2	1	4	1	1	1	1	1	1	3	1	4	
Switchboard Diamond Deckplate	1	4	1	1	2	1	1	2	2	1	4	1	1	1	1	1	1	3	1	4	
Switchboard Smooth	1	4	1	1	2	1	1	2	2	1	4	1	1	1	1	1	1	3	1	4	
Switchboard Corrugated	1	4	1	1	2	1	1	2	2	1	4	1	1	1	1	1	1	3	1	4	
AquaFlow	4	4	4	4	3	4	3	4	4	4	4	3	4	3	4	4	4	4	3	4	
Super Grip	4	4	4	4	3	4	3	4	4	4	4	3	4	3	4	4	4	4	3	4	
Trooper	4	4	4	4	3	4	3	4	4	4	4	3	4	3	4	4	4	4	3	4	

Key

1 = No Effect 2 = Little Effect 3 = Moderate Effect 4 = Not Recommended