

## Expand-A-Gates

Designed to set up quickly and easily wherever and whenever they are needed. Ideal for preventing potential accidents. Lightweight design allows personnel to quickly retrieve the gate and limit access to unsafe areas. Smooth operating scissor action. Interlocking and nestable. Suffix -C features casters. Suffix -W features one swivel caster with a wall/rack mounting kit. Model PEXGATE is constructed of heavy-duty molded yellow and black plastic. One side of gate includes reflectors for better visibility. End pieces are hollow and may be filled with liquid for added weight. Assembly required.



model EXGATE-30



STEEL CONSTRUCTION



ALUMINUM CONSTRUCTION  
model ALEXGATE-30-C

MODEL NUMBER	OVERALL COLLAPSED WIDTH	EXPANDED GATE WIDTH	*OVERALL HEIGHT	WEIGHT (POUND)
<b>STEEL CONSTRUCTION</b>				
EXGATE-30 <sup>®</sup>	19¾"	139"	38"	55
EXGATE-30-C <sup>®</sup>	19¾"	139"	40⅛"	57
EXGATE-30-W <sup>®</sup>	20 <sup>5</sup> / <sub>16</sub> "	139"	38 <sup>5</sup> / <sub>16</sub> "	61
EXGATE-W-KIT	WALL MOUNT KIT			5
<b>ALUMINUM CONSTRUCTION</b>				
ALEXGATE-30 <sup>®</sup>	19¾"	139"	38"	25
ALEXGATE-30-C <sup>®</sup>	19¾"	139"	40⅛"	30
ALEXGATE-30-W <sup>®</sup>	20 <sup>5</sup> / <sub>16</sub> "	139"	38 <sup>5</sup> / <sub>16</sub> "	34
ALEXGATE-W-KIT	WALL MOUNT KIT			5
<b>PLASTIC CONSTRUCTION</b>				
PEXGATE-30 <sup>®</sup>	11½"	122"	38"	12
PEXGATE-30-C <sup>®</sup>	11½"	122"	40¾"	13

\*OVERALL HEIGHT WHEN COLLAPSED



model EXGATE-30-W




Connector for wall mounted unit



Plastic unit is easy to fill for added weight



model PEXGATE-30

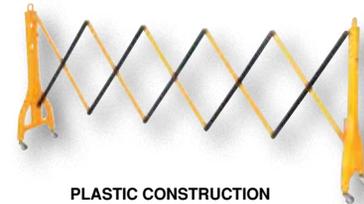

PLASTIC CONSTRUCTION  
model PEXGATE-30-C

## Industrial Duty Circulator Fans 115V 1-PHASE STANDARD

Two speed, 115V, 1 phase, ball bearing, totally enclosed and permanently lubricated Industrial Duty Circulator Fan. Pull chain switch with a 12 foot long cord and an SJT type 3 conductor cord. Meets OSHA standards and is ETL C/US listed. ¼ HP electric motor.

MODEL NUMBER	BLADE DIAMETER	MOUNTING STYLE	AMPS HIGH	CFM HIGH	CFM LOW	WEIGHT (POUND)
ICRF-24-P	24"	PEDESTAL	2.5	6800	5000	75
ICRF-24-W	24"	WALL	2.5	6800	5000	45
ICRF-30-P	30"	PEDESTAL	2.7	7900	6000	75
ICRF-30-W	30"	WALL	2.7	7900	6000	48
<b>OSCILLATING STYLE</b>						
ICRF-24-PO	24"	PEDESTAL	2.5	6800	5000	79
ICRF-24-WO	24"	WALL	2.5	6800	5000	49
ICRF-30-PO	30"	PEDESTAL	2.7	7900	6000	78
ICRF-30-WO	30"	WALL	2.7	7900	6000	53



model ICRF-24-P



Distributed by: Custom Equipment Company  
866-333-0728  
sales@custommhs.com  
www.custommhs.com