



Mobile Storage Locker

2000 lbs. Capacity

- Double doors open 270 degrees
- Padlockable slide latch on doors
- Two rigid and two swivel 6" polyurethane wheels
- Overall height: 56"

Interior* D x W	No Center Shelf 46-1/2" Clearance		1 Center Shelf 21-3/4" Clearance		2 Center Shelves 14" Clearance	
	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
24 x 48	SCN-2448-6PPY	186	SC-2448-6PPY	216	SC2-2448-6PPY	246
24 x 60	SCN-2460-6PPY	196	SC-2460-6PPY	228	SC2-2460-6PPY	266
30 x 48	SCN-3048-6PPY	196	SC-3048-6PPY	230	SC2-3048-6PPY	267
30 x 60	SCN-3060-6PPY	245	SC-3060-6PPY	275	SC2-3060-6PPY	320
30 x 72	SCN-3072-6PPY	291	SC-3072-6PPY	343	SC2-3072-6PPY	418
36 x 60	SCN-3660-6PPY	292	SC-3660-6PPY	345	SC2-3660-6PPY	420
36 x 72	SCN-3672-6PPY	350	SC-3672-6PPY	392	SC2-3672-6PPY	451

Floor Lock Option, add: -FL

Adjustable Shelf Models

- Removable center shelf
- 3-1/2" centers to adjust shelf

Interior* D x W	Model No.	Wt.
24 x 48	SC-A-2448-6PPY	242
24 x 60	SC-A-2460-6PPY	252
30 x 48	SC-A-3048-6PPY	258
30 x 60	SC-A-3060-6PPY	303

Floor Lock Option, add: -FL

* Note: For Outside Dimensions- Depth add 3", Width add 1"



Model
SC-3048-6PPY



Model
SC-A-3048-6PPY

Mobile Security Locker with Handle

2000 lbs. Capacity

- Double doors open 270 degrees
- Padlockable slide latch on doors
- Two rigid and two swivel 6" polyurethane wheels
- Overall height: 56"

Interior* D x W	No Center Shelf 46-1/2" Clearance		1 Center Shelf 21-3/4" Clearance		2 Center Shelves 14" Clearance	
	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
24 x 48	SCN-2448-6PY-1H	189	SC-2448-6PY-1H	219	SC2-2448-6PY-1H	249
24 x 60	SCN-2460-6PY-1H	199	SC-2460-6PY-1H	231	SC2-2460-6PY-1H	269
30 x 48	SCN-3048-6PY-1H	199	SC-3048-6PY-1H	233	SC2-3048-6PY-1H	270
30 x 60	SCN-3060-6PY-1H	248	SC-3060-6PY-1H	278	SC2-3060-6PY-1H	323
30 x 72	SCN-3072-6PY-1H	294	SC-3072-6PY-1H	346	SC2-3072-6PY-1H	421
36 x 60	SCN-3660-6PY-1H	295	SC-3660-6PY-1H	348	SC2-3660-6PY-1H	423
36 x 72	SCN-3672-6PY-1H	353	SC-3672-6PY-1H	395	SC2-3672-6PY-1H	454

Floor Lock Option, add: -FL

Adjustable Shelf Models

- Removable center shelf
- 3-1/2" centers to adjust shelf

Interior* D x W	Model No.	Wt.
24 x 48	SC-A-2448-6PY-1H	245
24 x 60	SC-A-2460-6PY-1H	255
30 x 48	SC-A-3048-6PY-1H	261
30 x 60	SC-A-3060-6PY-1H	306

Floor Lock Option, add: -FL

* Note: For Outside Dimensions- Depth add 3", Width add 1"



Model
SCN-2448-6PPY-1H

Distributed by:
Custom Equipment Company
866-333-0728
tom@custommhs.com
www.custommhs.com



Model
SC2-3048-6PYFP

Forkliftable Mobile Storage Locker

2000 lbs. Capacity

- Double doors open 270 degrees
- Padlockable slide latch on doors
- Two rigid and two swivel casters
- 6" x 2" non-marking polyurethane wheels
- Overall height: 56"
- Fork pockets

Deck Size	No Center Shelf 46-1/2" Clearance		1 Center Shelf 21-3/4" Clearance		2 Center Shelves 14" Clearance	
	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
24 x 48	SCN-2448-6PYFP	216	SC-2448-6PYFP	246	SC2-2448-6PYFP	276
30 x 48	SCN-3048-6PYFP	228	SC-3048-6PYFP	262	SC2-3048-6PYFP	299



Model
SC1-2448-6PY-PB

Tool Security Cart with Pegboard Tool Storage

2000 lbs. Capacity

- 16 gauge steel pegboard with holes 1" on center
- Doors open a full 270 degrees
- Interior height: 46-1/2"
- Double doors with padlockable slide latch
- Available with or without center shelf
- Two rigid and two swivel casters
- 6" non-marking polyurethane wheels

Shelf D x W	No Center Shelf		1 Center Shelf	
	Model No.	Wt.	Model No.	Wt.
24 x 48	SCN-2448-6PY-PB	206	SC1-2448-6PY-PB	236
24 x 60	SCN-2460-6PY-PB	221	SC1-2460-6PY-PB	253

For Louvered Panel, replace **-PB** with **-LP**

* Note: For Outside Dimensions- Depth add 3", Width add 1"



Model
SCN-3048-10SR

Cushion-Load Security Cart

1500 lbs. Capacity

- 13 gauge expanded metal
- Double doors with padlockable slide latch
- Doors open a full 270 degrees
- Overall height: 60"
- Interior height: 46-1/2"
- Available with adjustable shelves
- Two rigid and two swivel casters
- 10" solid rubber tires

Interior* D x W	No Center Shelf		1 Center Shelf		2 Center Shelves	
	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
24 x 48	SCN-2448-10SR	198	SC-2448-10SR	228	SC2-2448-10SR	258
24 x 60	SCN-2460-10SR	208	SC-2460-10SR	240	SC2-2460-10SR	278
30 x 48	SCN-3048-10SR	208	SC-3048-10SR	242	SC2-3048-10SR	279

* Note: For Outside Dimensions- Depth add 3", Width add 1"

Adjustable Shelf Models

Interior* D x W	Model No.	Wt.
24 x 48	SC-A-2448-10SR	254
24 x 60	SC-A-2460-10SR	264
30 x 48	SC-A-3048-10SR	270

* Note: For Outside Dimensions- Depth add 3", Width add 1"

Model
SC-A-3048-10SR





3 COMPARTMENT Mobile Storage Locker

2000 lbs. Capacity

- Three extra-large, 18" high openings
- Three double doors with padlockable slide latches
- Doors open a full 270 degrees
- Available in stationary or mobile model
 - Mobile: 67-1/2" OAH
 - Stationary: 64-1/4" OAH

Shelf D x W	Mobile - 6" Polyurethane		Stationary	
	Model No.	Wt.	Model No.	Wt.
24 x 48	SC2-6D-2448-6PY	289	SC2-6D-2448-NC	259
30 x 48	SC2-6D-3048-6PY	314	SC2-6D-3048-NC	281

* Note: For Outside Dimensions- Depth add 3", Width add 1"



**Model
SC2-6D-2448-6PY**



**Model
SC2-6D-2448-NC**

2-Sided Mobile Maintenance Cart with Pegboard or Louvered Panels

3600 lbs. Capacity

- Double-sided tool bench cart
- Available with pegboard or louvered panel separator
- 12 gauge steel top
- 13 gauge expanded metal ends
- 14 gauge perforated doors
- Both doors have a padlockable slide latch
- 6" non-marking polyurethane wheels
- Overall height: 33"

Size	Pegboard Panel		Louvered Panel	
	Model No.	Wt.	Model No.	Wt.
24 x 48	ST-2448-6PY-PB	215	ST-2448-6PY-LP	215

Floor Lock Option, add: **-FL**



**Model
ST-2448-6PY-PB**

Security Box Truck

1200 lbs. to 3600 lbs. Capacity

- Double-hinged top cover with padlock hasp
- Front drop-gate with spring latches
- Interior height: 36"
- Your choice of wheels:
 - 6" x 2" polyurethane - 3600 lbs. capacity
 - 10" x 2-3/4" solid rubber - 1500 lbs. capacity
- Available in an expanded metal or solid side version

	Deck Size D x W	6" Polyurethane		10" Solid Rubber	
		Model No.	Wt.	Model No.	Wt.
Expanded Metal Sides	24 x 48	SB-2448-6PY	173	SB-2448-10SR	185
	24 x 60	SB-2460-6PY	195	SB-2460-10SR	207
	30 x 48	SB-3048-6PY	196	SB-3048-10SR	208
	30 x 60	SB-3060-6PY	220	SB-3060-10SR	232
Solid Sides	24 x 48	SBS-2448-6PY	264	SBS-2448-10SR	284
	30 x 60	SBS-3060-6PY	331	SBS-3060-10SR	361

Floor Lock Option, add: **-FL**


Expanded Metal Version also available with 9" pneumatic, add: **-9P**



**Model
SB-2448-6PY**



**Model
SBS-2448-10SR**



Wheel Selection Guide


How to choose a wheel

- Load capacity
- Push start force
- Rolling/Floor conditions
- Durability/Duty requirements

Typical Factory Floor	Rough/Uneven/Outdoor
<p><i>Polyurethane</i> <i>Phenolic</i> <i>Mold-On Rubber</i></p>	<p><i>Pneumatic</i> <i>Solid Rubber</i> <i>Flat-Free</i></p>

Phenolic	Polyurethane	Mold-On Rubber	Solid Rubber	Flat-Free	Pneumatic
Most	<Load Capacity>	Least	Least	<Maintenance>	Most
Least	<Cushion>	Most	Least	<Cushion>	Most
<p>Load Capacity Range per Caster Set (4): 3600-5000 lbs.</p> <p>Chemical Resistant High Temperature Non-marking</p> <p>Applications: Least rolling resistance, but does not absorb vibrations</p>	<p>Load Capacity Range per Caster Set (4): 1200-4000 lbs.</p> <p>Non-marking Tread Chemical Resistant Quiet Operation</p> <p>Applications: Industrial, Warehouse, Institutional</p>	<p>Load Capacity Range per Caster Set (4): 2000-2400 lbs.</p> <p>Cushion Tread Absorbs shock/vibration Floor Protection Quiet Operation</p> <p>Applications: Industrial & Warehouse</p>	<p>Load Capacity Range per Caster Set (4): 1200-1600 lbs.</p> <p>Cushioned rubber tire that is more stable and easier to roll under heavy loads than pneumatic.</p> <p>Rugged and maintenance free.</p>	<p>Load Capacity Range per Caster Set (4): 1600 lbs.</p> <p>Wide Rubber tread disperses the load better over irregular or softer surfaces. Less tread compression than pneumatic or solid rubber tires. Only available with off-set hub.</p>	<p>Load Capacity Range per Caster Set (4): 1200-4000lbs.</p> <p>Air Filled rubber tire on a metal hub is able to easily roll over uneven surfaces and bumps.</p> <p>Requires air pressure.</p>

Swivel vs. Rigid Caster

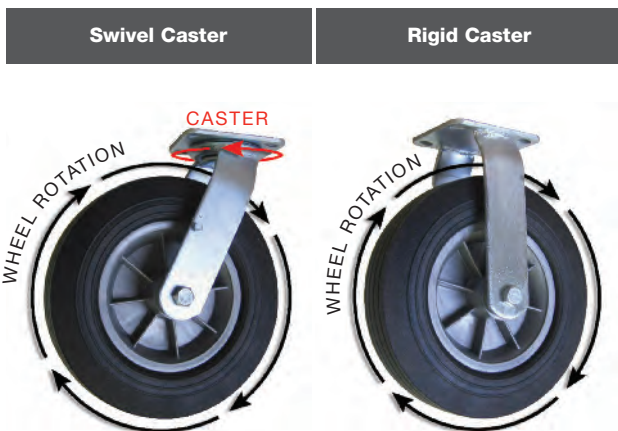

Wheel Brake Options

Total Lock Brakes	Swivel Position Lock	Wheel Brakes	Floor Lock
<p>Locks both the rotation of the wheel, as well as the swivel of the caster.</p> <p>Only available on the 5" polyurethane caster.</p>	<p>Converts swivel caster to rigid by locking the swivel movement.</p> <p>Only available on the 8" Heavy-Duty phenolic caster.</p>	<p>Locks the rotation of the wheel. Does not lock the swivel movement of the caster.</p> <p>Wheel brakes are required on each swivel caster to effectively lock the cart in position.</p>	<p>Positioned between swivel casters to lift casters slightly off ground, preventing any unwanted movement.</p> <p>Floor Locks are available on most units with 6" or 8" casters.</p>



Wheel Selection Guide

Polyurethane Wheels

Load Capacity Range:
300 – 1,000 lbs.



Characteristics: Easier rolling for higher capacities, long-lasting, chemical resistant, non-marking and quiet operation.

A polyurethane tread is superior for industrial, warehouse, and institutional applications with a great combination of easy rolling and maneuverability under heavy load capacity while able to quietly roll over rough floor surfaces.

Phenolic Wheels

Load Capacity Range:
900 – 1,250 lbs.



Characteristics: Best rolling for heavy load capacities, long-lasting, chemical resistant, high temperature, non-marking for smooth floor surface.

A solid one piece wheel that is high pressure molded with reinforced fiber-filled phenolic resin. Offers the least rolling resistance on smooth floors, but does not absorb vibration over rough surfaces.

Mold-On Rubber Wheels

Load Capacity Range:
500 – 600 lbs.



Characteristics: Better load capacity, long-lasting, cushion tread, absorbs shock and vibration, floor protection and quiet operation.

Rubber tread vulcanized to metal core. A good combination of load capacity and cushion tread that quietly rolls over rough floors. A great wheel choice for heavy industrial and warehouse applications.

Solid Rubber Wheels

Load Capacity Range:
300 – 400 lbs.



Characteristics: Good load capacity, great for rough floor surfaces, puncture-proof, floor protection and quiet operation.

Cushioned rubber tire that is more stable and easier to roll under heavy loads than pneumatic wheels. These wheels are a rugged, maintenance-free (no air pressure to maintain) alternative to pneumatic wheels.

Pneumatic Wheels

Load Capacity Range:
300 – 400 lbs.



Characteristics: Great cushion ride over rough floor surfaces, best option for traveling over small obstructions or outdoor applications. Best shock and vibration absorption.

An air filled rubber tire on a metal hub is able to easily roll over uneven surfaces and bumps but does require air pressure management. Under heavy loads, the pneumatic tire profile will compress, creating greater rolling resistance. Ideal for handling fragile loads over rough surfaces.

Flat Free Hand Truck Wheels

Load Capacity Range:
400 lbs.



Characteristics: Wide rubber tread disperses the load better over irregular or softer surfaces. Less tread compression than pneumatic or solid rubber tires and precision ball bearings improve rollability of heavier loads.

Wheel Specifications

Wheel Diameter	Tread Width	Wheel Type	Bearing I.D.	Centered Hub Model No.	Offset Hub Model No.
5	1-1/4	Polyurethane	3/8" Ball	WHMP-05114	-
6	2	Mold-On Rubber	3/4" Roller	WHMS-0620	-
		Polyurethane	1/2" Ball	WHMP-0620	-
8	2	Phenolic	3/4" Roller	WHPL-0620	-
		Mold-On Rubber	3/4" Roller	WHMS-0820	-
		Polyurethane	1/2" Ball	WHMP-0820	-
8	2-1/2	Phenolic	3/4" Roller	WHPL-0820	-
8	2-1/2	Solid Rubber	5/8" Ball	-	WHSP-0825-0
9	3	Pneumatic 2.80/2.50-4	5/8" Ball	WHPN-0830	-
10	2-3/4	Solid Rubber	5/8" Ball	WHSP-1027P-C	WHSP-1027-P
10	3-1/2	Pneumatic 4.10/3.50-4	5/8" Ball	WHPN-1035-C	WHPN-1035
10	3-1/2	Flat Free	5/8" Ball	-	WHFF-1035
12	2-1/2	Mold-On Rubber	1" Roller	WHMS-12250	-
12	3-1/2	Pneumatic 4.10/3.50-6	5/8" Ball	WHPN-1235	-
		Pneumatic 4.10/3.50-6	1" Roller	WHPN-1235-RB	-
16	4	Pneumatic 4.80/4.00-8	1" Roller	WHPN-1640	-