




## **REEL RACKS**

## STORE AND DISPENSE VIRTUALLY ANY PRODUCT THAT MUST BE PAYED OUT FROM A REEL

**MECO OMAHA**'s Reel Rack is built to withstand the abuse and punishment found in a manufacturing or distribution environment. Store and dispense poly or wire rope, hose, electrical cable or chain—anything on a reel or spool. Double welded uprights are manufactured from hefty 3" structural channel and welded to a 4" channel base. 96" units have 3 pairs of axle brackets and axles, 120" and 144" units have 4 pairs (additional axles and brackets may be ordered separately). The **MECO OMAHA** axle bracket is adjustable on 2" centers up and down the uprights. Axles supplied by **MECO OMAHA** are 11/2" diameter; brackets accept axles up to 21/2" diameter. It is strongly recommended that units be secured to the floor before use. Ships knocked down; gray enamel finish with orange axle brackets.

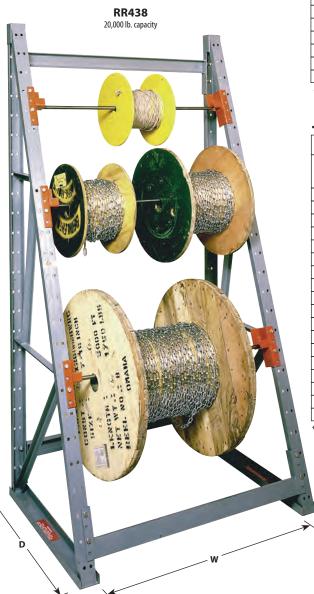

## • 2,000 LB CAPACITY PER LEVEL

STARTER UNITS								
MODEL NO.	DIMENSIONS*			MAX. REEL				
	WIDTH	DEPTH	HEIGHT	WIDTH	WEIGHT			
RR228	24"	24"	96"	19"	220 lbs			
RR328	36"			31"	240 lbs			
RR428	48"	1		43"	265 lbs			
RR238	24"			19"	240 lbs			
RR338	36"	36"		31"	259 lbs			
RR438	48"	]		43"	285 lbs			
RR2210	24"	24"	120"	19"	259 lbs			
RR3210	36"			31"	281 lbs			
RR4210	48"			43"	310 lbs			
RR2310	24"	36"		19"	276 lbs			
RR3310	36"			31"	298 lbs			
RR4310	48"			43"	327 lbs			
RR2212	24"	24"	- 144"	19"	323 lbs			
RR3212	36"			31"	345 lbs			
RR4212	48"			43"	374 lbs			
RR2312	24"	36"		19"	340 lbs			
RR3312	36"			31"	362 lbs			
RR4312	48"			43"	391 lbs			
RR-BKT	R-BKT Axle Brackets (per pair)							

<sup>\*</sup> WIDTH FIGURE REPRESENTS THE INSIDE DIMENSION. ADD 8" TO WIDTH FIGURE FOR OVERALL WIDTH DIMENSION.

## • 2,000 LB CAPACITY PER LEVEL

ADD-ON UNITS								
MODEL NO.	DIMENSIONS*			MAX. REEL	WEIGHT			
	WIDTH	DEPTH	HEIGHT	WIDTH	WEIGHT			
RR228-A	24"	24"	96"	19"	142 lbs			
RR328-A	36"			31"	162 lbs			
RR428-A	48"			43"	187 lbs			
RR238-A	24"	36"		19"	152 lbs			
RR338-A	36"			31"	171 lbs			
RR438-A	48"	]		43"	197 lbs			
RR2210-A	24"	24"	120"	19"	168 lbs			
RR3210-A	36"			31"	189 lbs			
RR4210-A	48"			43"	218 lbs			
RR2310-A	24"	36"		19"	176 lbs			
RR3310-A	36"			31"	197 lbs			
RR4310-A	48"			43"	226 lbs			
RR2212-A	24"	24"	144"	19"	197 lbs			
RR3212-A	36"			31"	219 lbs			
RR4212-A	48"			43"	248 lbs			
RR2312-A	24"	36"		19"	205 lbs			
RR3312-A	36"			31"	227 lbs			
RR4312-A	48"			43"	256 lbs			

<sup>\*</sup> WIDTH FIGURE REPRESENTS THE INSIDE DIMENSION. OVERALL WIDTH WILL INCREASE BY 4" WHEN ADDED TO A STARTER UNIT.

For More Information: 866-333-0728 Custom Equipment Company tom@customMhs.com www.customMhs.com