



OPTIONAL EXTRAS



REMOTE CONTROL

LEVEL CONTROL

LOGIFLEX ATTACHMENTS

BRAND ELEMENTS

OTHERS

Optional extras

High flexibility and multi-functional solutions. Flexibility in usage, design, look and purpose is very important for many of our customers

A high level of flexibility can improve the value of the solution and boost performance in the workflow. To meet different needs and preferences, we have a broad assortment of optional extras and attachments for our products.

Our remote control is one of our most popular add-ons for our electric and fully powered products. With a remote control you can operate the equipment easily by pressing a button from a safe distance.

The level control is also a preferred add-on for our highlifters and stackers. This is a unique feature, which automatically ensures proper working heights and good

ergonomic conditions for the workers. It is the ideal solution for customers, who care about their employees and a healthy working environment.

For our Logiflex programme, we offer different attachments for the adjustable carriage, which allows you to use the equipment for different purposes. If you handle different types of elements, you can easily switch between different attachments - without having to use different equipment.

We also have options for colours, logos and other personalisation features.

Find inspiration in this brochure.



**Platform**

To transport different kinds of goods, also non-palletised goods

**Drum forks**


To handle drums in horizontal position

**Fork styles**


Different fork styles to lift and transport different pallets

**Drum turner**

To handle standard steel and plastic drums

**Crane arm**

To lift and transport items with a hook

**Boom**

To lift and transport reels in horizontal positions

Optional extras

For More Information
Custom Equipment Company
sales@custommhs.com
866-333-0728
Full Website: <https://www.custommhs.com>



Remote control



Level control



Low speed valve

Remote control

To optimise your experience with our solutions and to improve your conditions for safe and efficiency material handling, we offer our all-in-one remote control for our electric and fully powered products.

With the remote control you can operate the equipment from a safe distance and with a clear overview. Our customers highly value this option as it benefits in terms of flexibility, safety and efficiency.

The remote control comes as wireless or with cable (250 cm).

Level control

How do you ensure to always have a proper working height, when you empty and load pallets? The automatic level control does that for you.

The level control is attached to your equipment, and an electric sensor will ensure the forks raise/lower as the pallet is loaded/emptied.

This way the working height is constant, as it automatically adjusts to the pre-set working height.

The ergonomically correct working position and height help prevent injuries and strain on the operator, and he/she can work faster and more efficient without extra physical efforts.

The level control is user-friendly and easy to programme. It is very robust and compact, which prevents it from getting in the way.

Available for electric highlifters and stackers - also for stainless versions.

Additional extras

Low speed valve

With the low speed valve, you can reduce the lifting and lowering speed of your equipment with a remote control (wireless or cable).

This is relevant in situations where you e.g. need to:

- place reels carefully and precisely into a machine
- handle valuable and fragile vials in the pharma industry

You can reduce lifting speed by 1/3 and lowering speed by 2/3.

Optional extras



Logidock



Branding

Additional extras

Logidock

The Logidock is a "parking station" for your pallet truck.

It is a simple solution if you need to fix your pallet truck during transportation (e.g. in lorries).

The non-skid rubber ring is easy to move around and place where ever you need to fix your pallet truck, when you are not operating.

Branding

To provide a unique product experience, we also customise the equipment according to your company colour, logo and brand name.

Receive your material handling equipment in your own company colour to match your working environment, or have your brand name/logo cut out in the triangle of your pallet trucks.

Level control - logiflex attachments

Level control

How do you ensure to always have a proper working height, when you empty and load pallets? The automatic level control does that for you.

The level control is attached to your equipment, and an electric sensor will

ensure the forks raise/lower as the pallet is loaded/emptied.

This way the working height is constant, as it automatically adjusts to the pre-set working height.


The ergonomically correct working position and height help prevent injuries and strain

on the operator, and he/she can work faster and more efficient without extra physical efforts. The level control is user-friendly and easy to programme. It is very robust and compact, which prevents it from getting in the way.

Available for electric highlifters and stackers - also for stainless versions.



Level control

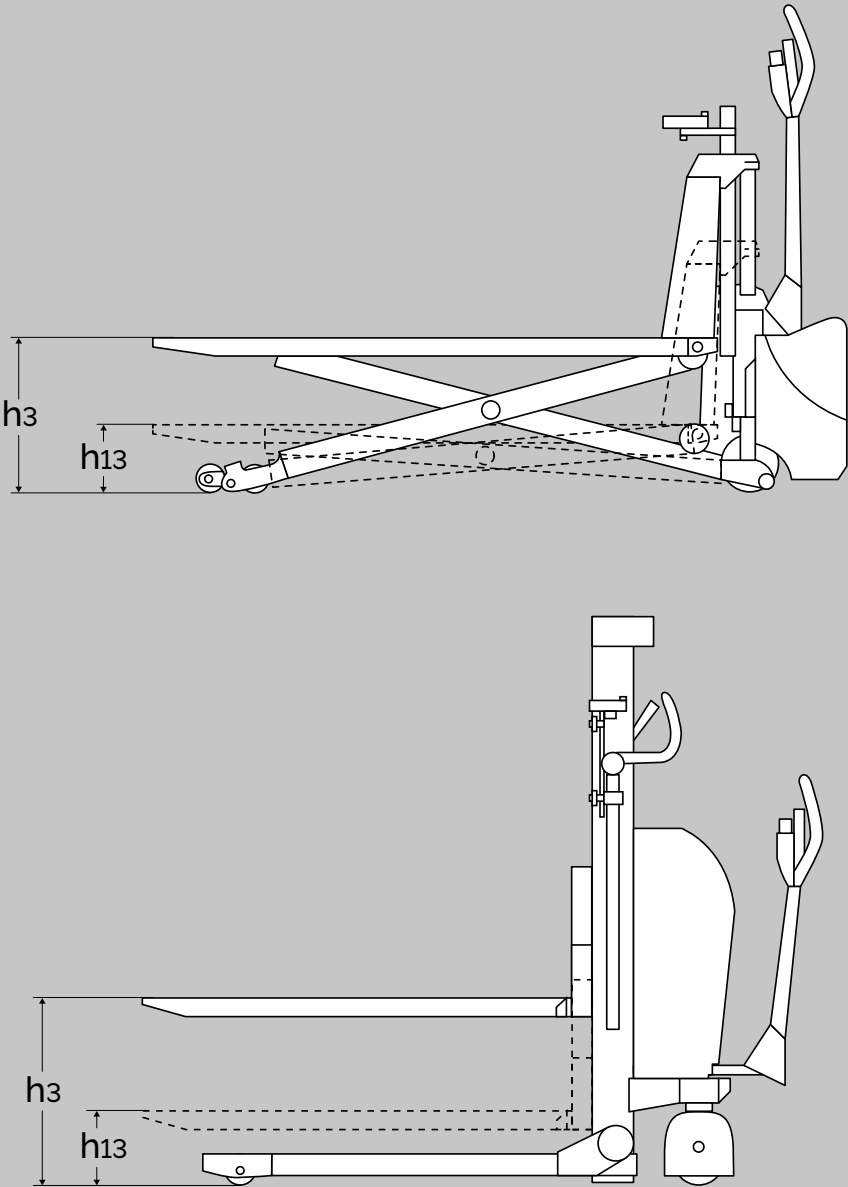

PRODUCT (measured in mm)		HIGHLIFTER	LOGIFLEX
Level control type		LC4	LC4
Detection range of photocell		100-2000 (adjustable)	100-2000 (adjustable)
Working height of photocell		490-970 (adjustable)	300-1350 (adjustable)
Reaction time of photocell		1-25 seconds (adjustable)	1-25 seconds (adjustable)
Turnable photocell		+/- 30°	+/- 30°
Lifting height activated level control	h_3	800	900
Lowered height activated level control	h_{13}	200	200

Drum forks (QDF) - logiflex attachments

To lift and transport drums horizontally

The drum forks make it easy and safe to lift and transport drums, paper reels and barrels horizontally.

Dimensions

- Drum diameter with a fork carriage of 810 mm: Minimum 100 mm, maximum 1000 mm.
- Drum diameter with a fork carriage of 690 mm: Minimum 100 mm, maximum 750 mm.


Note: If you have a Logiflex with standard legs (not straddle), the reel must be placed on a pallet to grab it.

The drum forks can easily be replaced by one of the many fork options, we offer as optional extras. If you need to turn and empty the drums, we recommend our drum turner instead.

	Features
Quick shift system	●
Manual	●
Electric	●
Fully powered	●
Remote control	●
Straddle legs	●
Standard legs	●



Drum forks (QDF) - logiflex attachments

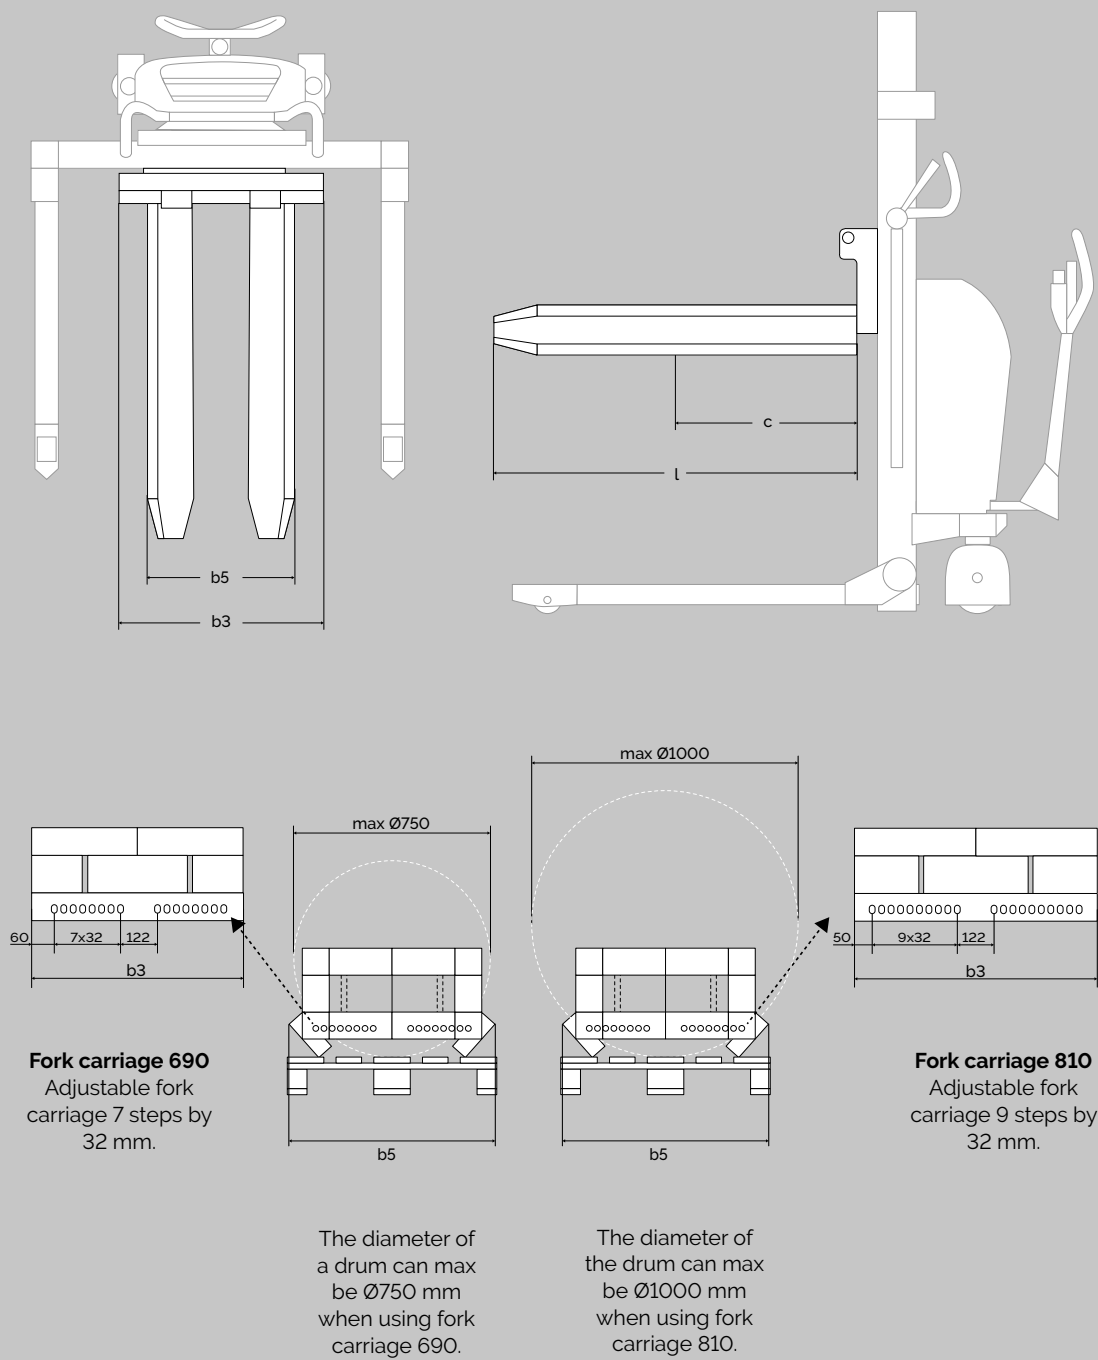

PRODUCT (measured in mm)		LF, LFS, ELF, ELFS, SELF, SELFS
Capacity		max. 500 kg
Fork length	l	600, 800, 1150
Width of fork carriage	b ₃	690, 810
Maximum width of drum forks	b ₅	692, 820
Maximum drum diameter	d	750 by a carriage of 690 and 1000 by a carriage of 810
Load centre	c	l/2

Fork styles (QWOF, QBF, QCF) - logiflex attachments

Wrap-over forks, bar forks or chisel forks
With the different fork styles you can easily lift and transport different types of pallets.

- Wrap-over forks: Standard forks for Logiflex
- Bar forks: Narrow forks - entry widths more narrow than on a EUR pallet

- Chisel forks: Thin forks for low heights under the load. Standard for trucks with capacity of 1200 kg.

You can attach the forks to all Logiflex models with an adjustable carriage, and replace them by one of the many quick shift options we offer.

	Features
Quick shift system	●
Manual	●
Electric	●
Fully powered	●
Remote control	●
Straddle legs	●
Standard legs	●



Wrap-over




Bar



Chisel

Fork styles (QWOF, QBF, QCF) - logiflex attachments

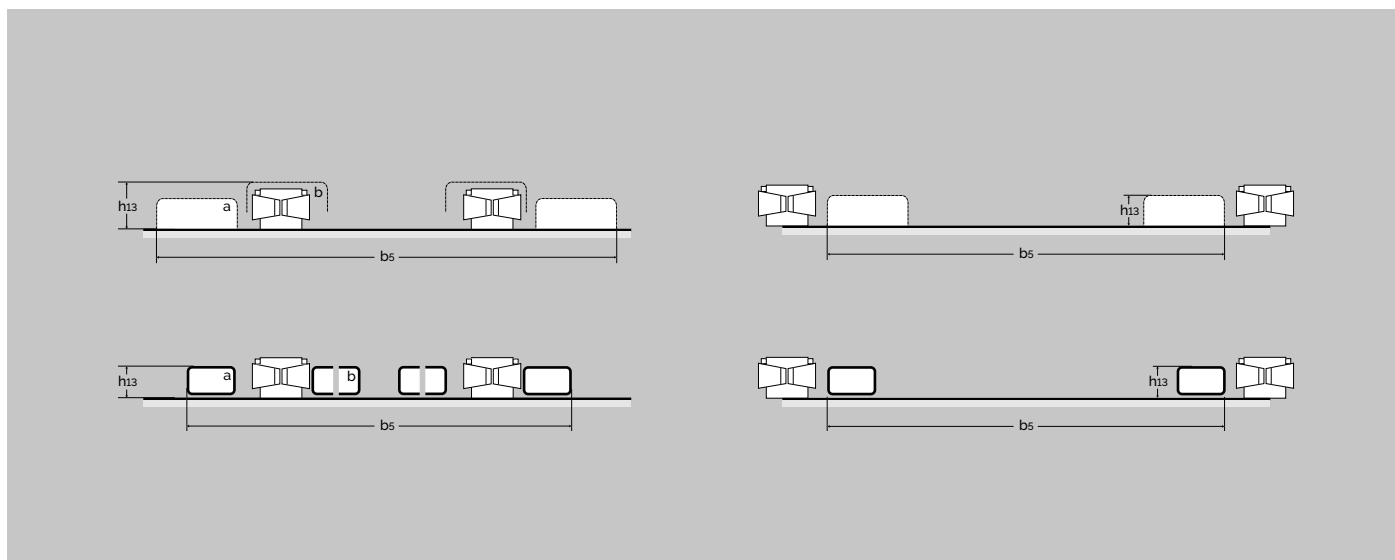

PRODUCT (measured in mm)	FORK CARRIAGE 440 mm*			FORK CARRIAGE 690 mm**		
-----------------------------	--------------------------	--	--	---------------------------	--	--

Fork style		Wrap-over 	Bar 	Chisel 	Wrapover 	Bar 	Chisel 
Size of wheel		Ø75			Ø85		
Fork span	b _s	350-560	230-430	230-430	350-800	230-680	230-680
Fork span - a	b _s						
Fork span - b	b _s	560	230-300	230-300	560	230-300	230-300
Lowered fork height - straddle legs	h ₁₃	85	85	60	65	65	40
Lowered fork height - a	h ₁₃						
Lowered fork height - b	h ₁₃	85	85	60	90	65	40
Fork dimensions		163x61	100x60	100x35	163x61	100x60	100x35

PRODUCT (measured in mm)	FORK CARRIAGE 810 mm*			FORK CARRIAGE 946 mm**		
-----------------------------	--------------------------	--	--	---------------------------	--	--

Fork style		Wrap-over 	Bar 	Chisel 	Wrapover 	Bar 	Chisel 
Size of wheel		Ø85			Ø85		
Fork span	b _s	350-920	230-800	230-800	530-1050	420-930	420-930
Fork span - a	b _s	876-920	750-800	750-800	876-1050	750-930	750-930
Fork span - b	b _s	560	230-300	230-300	560		
Lowered fork height - straddle legs	h ₁₃	65	65	40	65	65	40
Lowered fork height - a	h ₁₃	65	65	40	65	65	40
Lowered fork height - b	h ₁₃	90	65	40			
Fork dimensions		163x61	100x60	100x35	163x61	100x60	100x35

* Standard carriage for LF MINI and ELF with capacity 1000 kg and lifting height 920 and 1650 mm.

** Standard carriage for Logiflex straddle stackers with wrap-over forks.

*** Standard carriage for Logiflex straddle stackers with bar and chisel forks.

Standard carriage for Logiflex stackers without straddle legs (but fork carriage 440 mm for LF MINI and ELF with capacity 1000 kg and lifting height 920 and 1650 mm).

Boom (QBM) - logiflex attachments

With the boom you can safely and easily carry and transport reels in horizontal position

The capacity of the boom depends on weight and length of the reel. The load must be placed evenly over the length of the boom.

As a safety precaution, the load centre of

the reel must be placed behind the load wheel centre on the legs.


Note: If you have a Logiflex with standard legs (not straddle), the reel must be placed on a pallet - not directly on the floor.

The boom has a quick shift system and is therefore easy and quick to fit on all Logiflex models with adjustable carriage.

	Features
Quick shift system	●
Manual	●
Electric	●
Fully powered	●
Remote control	●
Straddle legs	●
Standard legs	●



Boom (QBM) - logiflex attachments

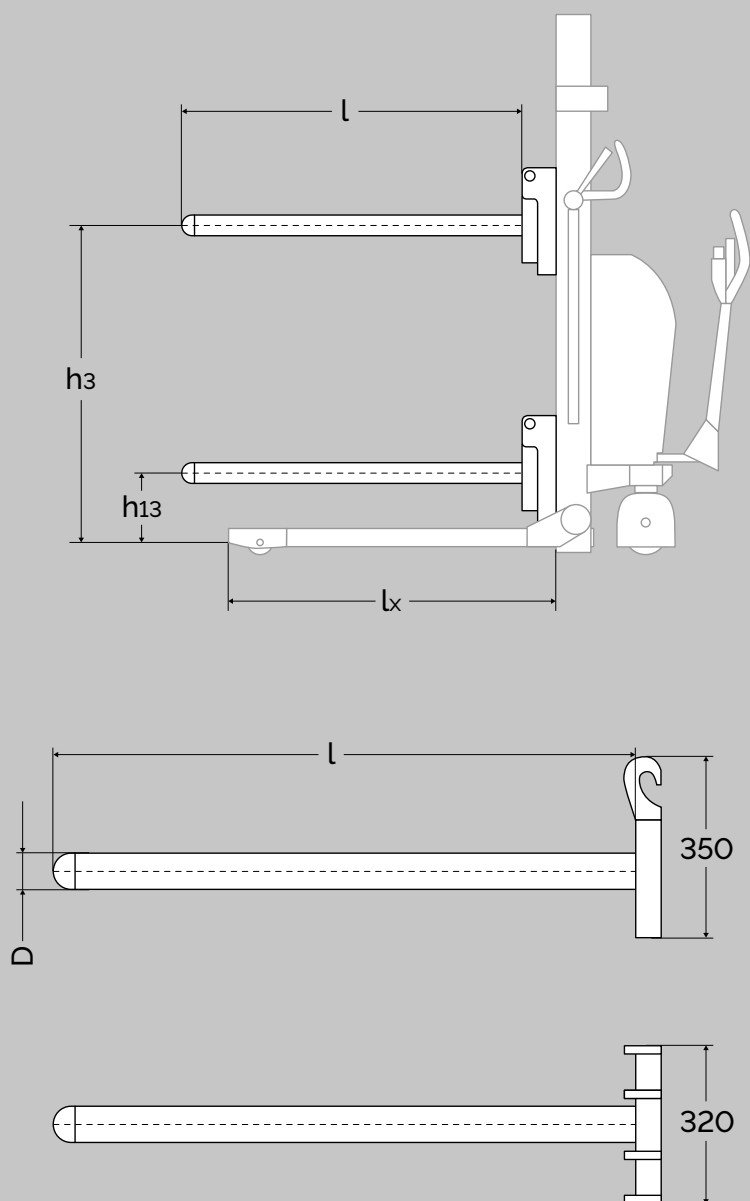

PRODUCT (measured in mm)		LF MINI, ELF, SELF MINI, SELF MAXI		LFS MINI, ELFS, SELFS MINI, SELFS MAXI		LF MINI, ELF, SELF MINI, SELF MAXI		LFS MINI, ELFS, SELFS MINI, SELFS MAXI		
Run-in lengths		l _x	806		818		1106		1068	
Lifting height, boom		h ₃	h ₁₃ + lifting height (Logiflex)							
Lowered height, boom		h ₁₃	170 (without load)							
Length of boom		l	800				1150			
Diameter of boom		D	40	50	70	40	50	70		
Capacity (kg)			330 kg	650 kg	1000 kg	230 kg	430 kg	800 kg		

Platform (QPF) - logiflex attachments

To move different items not necessarily placed on pallets

The platform makes it easy for you to lift and carry items that are not placed on pallets in a safe and efficient way.

Examples

- equipment with wheels
- small trolleys
- pressure cleaners
- vacuum cleaners

It can, however, also carry and transport pallets.

Dimensions


- Max. capacity: 1000 kg (load evenly distributed on the platform).
- Width: 1092 mm.
- Length: 990 mm or 1220 mm.

Note: You can lower the platform all the way to the ground using a Logiflex with straddle legs. Not with standard legs.

	Features
Quick shift system	●
Manual	●
Electric	●
Fully powered	●
Remote control	●
Straddle legs	●
Standard legs	●



Platform (QPF) - logiflex attachments

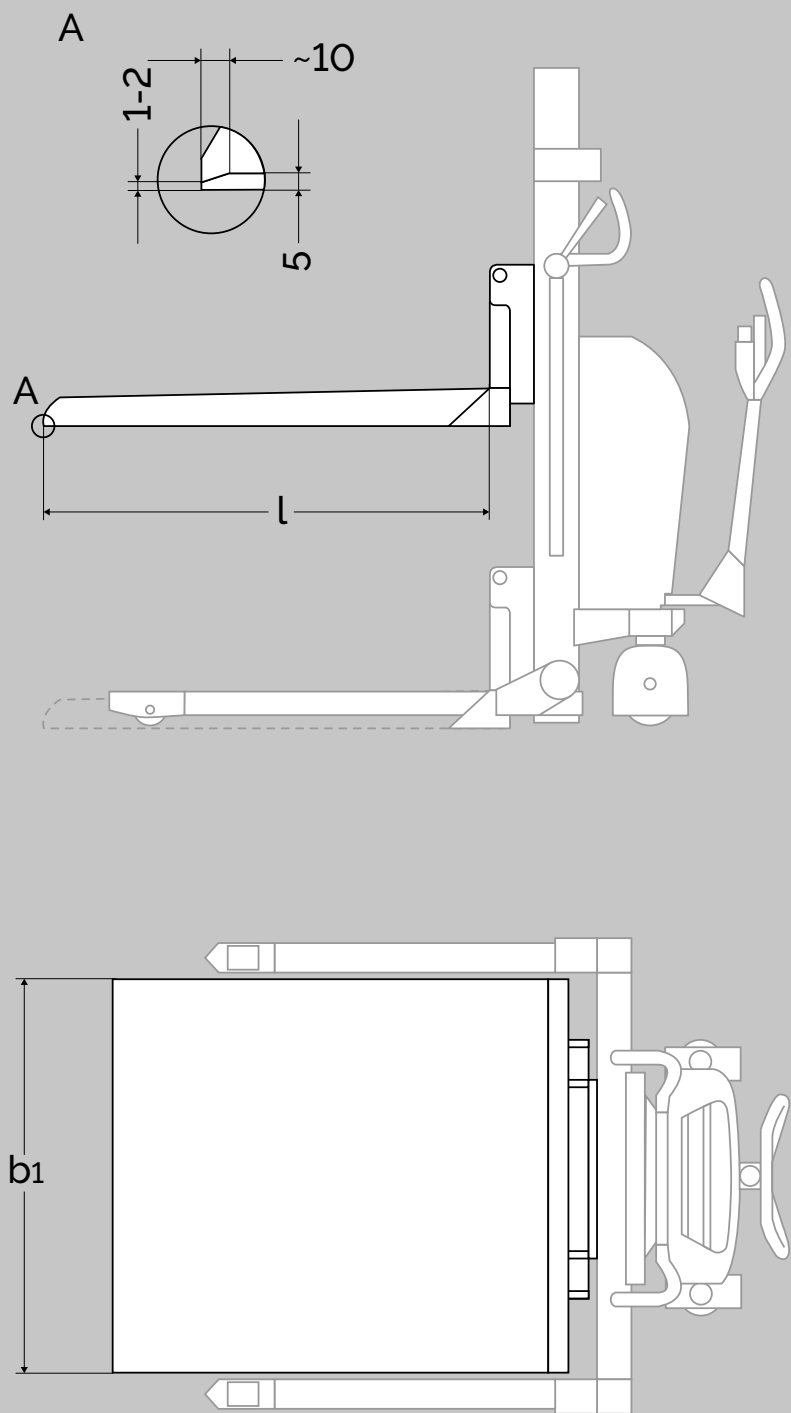

PRODUCT (measured in mm)		LFS, ELFS, SELFS
-----------------------------	--	------------------

Capacity		Max. capacity 1000 kg (when the load is distributed evenly)
Width of platform	b	1092
Length of platform	l	990, 1220

Crane arm - logiflex attachments

Crane arm (TC 750)

For our Logiflex Stackers we offer the telescopic crane arm, TC 750.

The telescopic crane arm has different positions, and different lengths from 750 mm to max. 1600 mm. The capacity of the telescopic crane arm depends on each position.

The adjustable length makes it very flexible to use. It can be used for heavy units of max. 750 kg, and for units up to max. 200 kg, when positioned up to 1600 mm from the mast of the stacker.

Please always contact us in order to find the best and safest solution for you.

Crane arm (QCA)

Designed to lift and carry machine tools with a hook.



The crane arm makes it easy to lift and transport heavy objects, such as machine tools, plastics moulds and components. It has an adjustable chain with a hook.

Maximum capacity: 500 kg.

	Features
Quick shift system	●
Manual	●
Electric	●
Fully powered	●
Remote control	●
Straddle legs	●
Standard legs	●



Crane arm - logiflex attachments

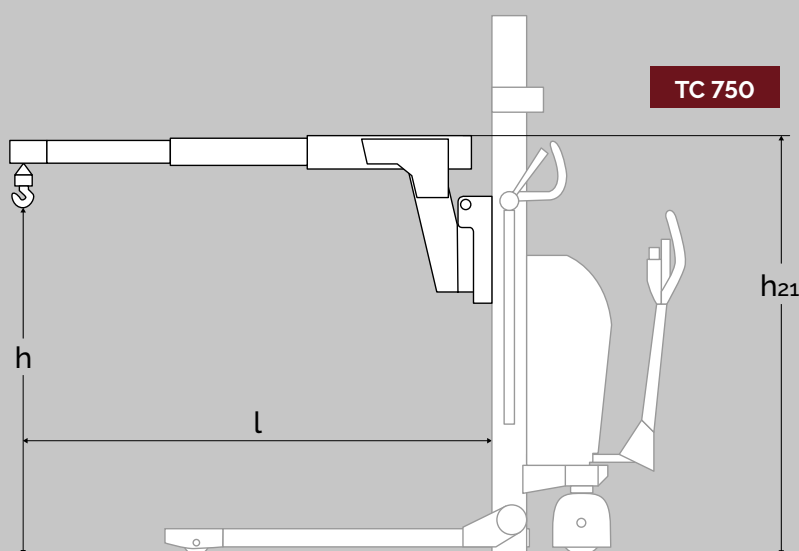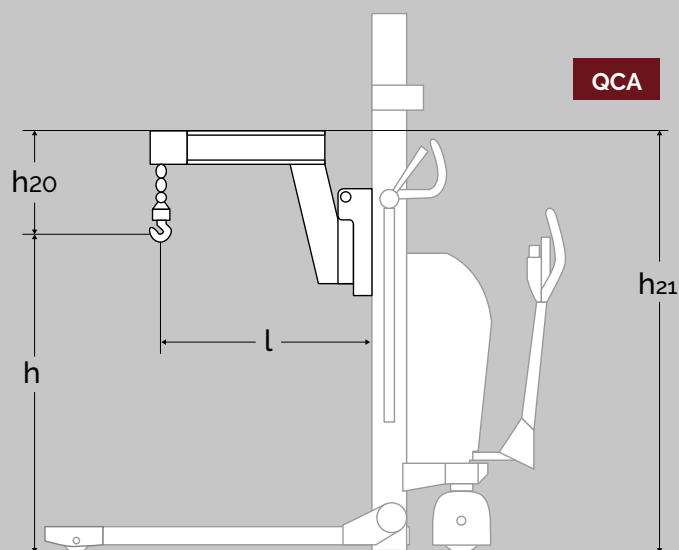

PRODUCT (measured in mm)		QCA	TC 750
Capacity		Max. 500 kg	
Total length	l	750	750-1600
— Length / capacity			750 / 750 kg
— Length / capacity			750-1175 / 350 kg
— Length / capacity			1175-1600 / 200 kg
Lifting height, hook	h	0 - (h ₃ * + 345)	h ₃ * + 200, (max. 2210)
Hook length	h ₂₀	210-640	
Total height	h ₂₁	h ₁ + 160	h ₁ + 160

*Find the h₃ measure in the spec sheet for the stacker model in question.

Drum turner (QDTA) - logiflex attachments

To lift and rotate standard drums

If you handle standard measured drums and only handle one type of drums, our Logiflex drum turner is a good match for you. This drum turner can handle standard steel drums (DS/EN 210) and standard plastic drums (DS/EN 12707) in an ergonomic, safe and efficient way.

The drum turner has a capacity of 250 kg. The turning angle of 360° makes it possible to empty a drum.

Electric drum turner

- Speed control
- Delicate operation
- Protected gearbox
- The electric drum turner is only available for electric and fully powered Logiflex models






Manual drum turner

- Gearing is 1:80 - manually turn the handle 80 times to turn the clamps 360°.

	Features
Quick shift system (for the manual version)	●
Manual	●
Electric	●
Fully powered	●
Remote control	●
Straddle legs	●
Standard legs	●



Drum turner (QDTA) - logiflex attachments

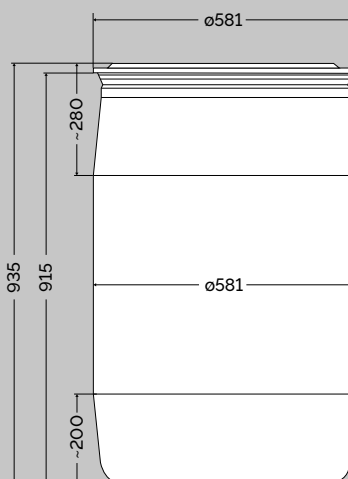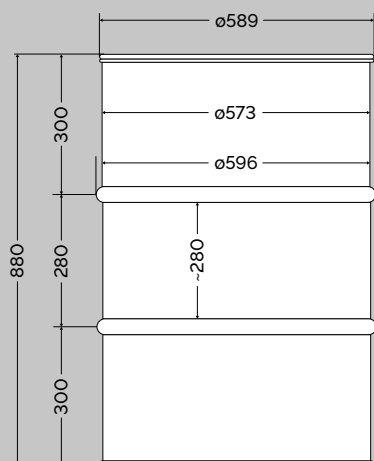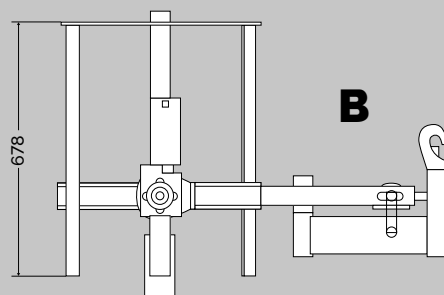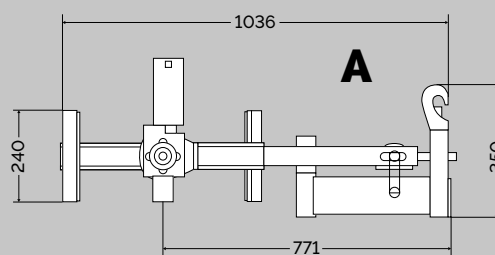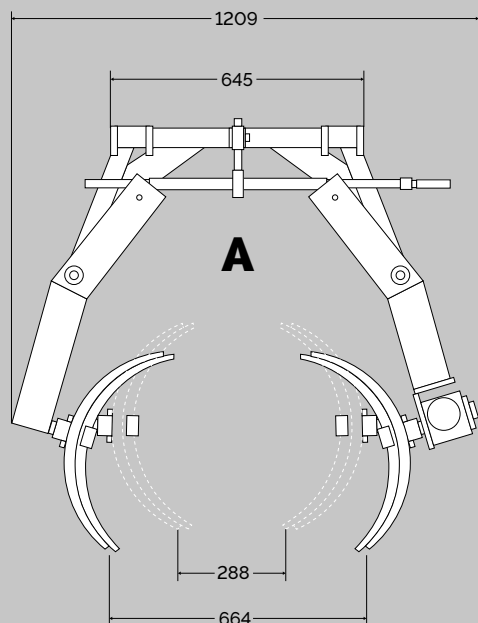

For More Information
Custom Equipment Company
sales@custommhs.com
866-333-0728
Full Website: <https://www.custommhs.com>