


Battery Stackers

Battery-Operated Stackers

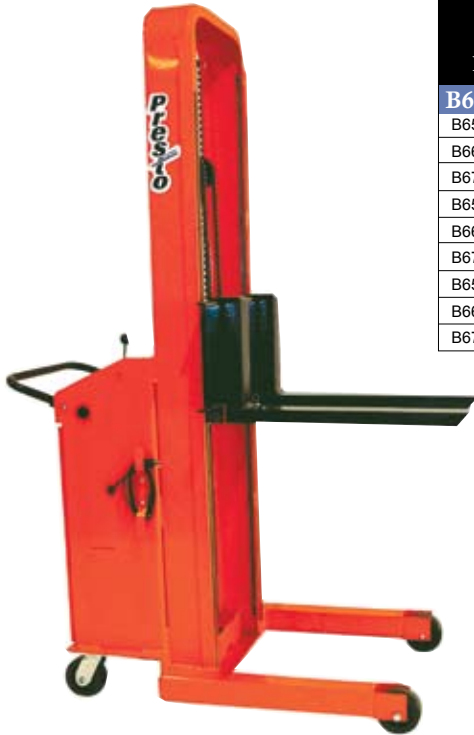

Model Number	Load Capacity	Raised Height	Lowered Height	Dimensions H / W / L	Base Legs I.D. / O.D.	Wheel Dia. Front/Rear	Shipping Weight
B600 Series - Adjustable 25" Forks (Non-Straddle) - 15" Load Center							
B652	1000 lbs	52"	5-1/4"	67 x 27 x 49"	15" / 21"	5" / 5"	500 lbs
B666	1000 lbs	66"	5-1/4"	81 x 27 x 49"	15" / 21"	5" / 5"	520 lbs
B678	1000 lbs	78"	5-1/4"	93 x 27 x 49"	15" / 21"	5" / 5"	540 lbs
B652-1500	1500 lbs	52"	5-1/4"	67 x 27 x 49"	15" / 22"	5" / 5"	530 lbs
B666-1500	1500 lbs	66"	5-1/4"	81 x 27 x 49"	15" / 22"	5" / 5"	550 lbs
B678-1500	1500 lbs	78"	5-1/4"	93 x 27 x 49"	15" / 22"	5" / 5"	570 lbs
B652-2000	2000 lbs	52"	5-1/4"	67 x 27 x 49"	20" / 26"	5" / 5"	550 lbs
B666-2000	2000 lbs	66"	5-1/4"	81 x 27 x 49"	20" / 26"	5" / 5"	570 lbs
B678-2000	2000 lbs	78"	5-1/4"	93 x 27 x 49"	20" / 26"	5" / 5"	590 lbs

Features

- 1000 - 2000 lb capacity
- 15" load center
- Lifting heights - 52" through 78"
- 1" thick x 3" wide adjustable solid steel forks on 1000 lb & 1500 lb units
- 1-1/2" thick x 3" wide adjustable solid steel forks on 2000 lb units
- Forks adjust from 6-1/2" to 26-1/2" O.D.
- 12" high fork backs
- Lifting speed 5" per second
- Fixed base
- Heavy-duty 12V battery
- Foot-operated floor lock
- Leaf-type chain with 8250 lb yield point
- Optional 24" x 24" slip-on platform
- Floor-saving phenolic wheels
- Perforated metal screen
- LED dash mount -- diagnostic display
- 3-position "Comfort Cushion" push handle
- Custom micro-processor charger
- Quickconnect battery cables (no tools required)

Straddle Stackers



Model Number	Load Capacity	Raised Height	Lowered Height	Dimensions H / W / L	Base Legs I.D. / O.D.	Wheel Dia. Front/Rear	Shipping Weight
B800 Series - 20" Load Center							
B862-1500	1500 lbs	62"	2"	80 X 32 X 54"	26" / 32"	5" / 4"	625 lbs
B874-1500	1500 lbs	74"	2"	92 X 32 X 54"	26" / 32"	5" / 4"	650 lbs
B886-1500	1500 lbs	86"	2"	104 X 32 X 54"	26" / 32"	5" / 4"	670 lbs
B862-2000	2000 lbs	62"	2-1/2"	80 X 32 X 54"	26" / 32"	5" / 4"	635 lbs
B874-2000	2000 lbs	74"	2-1/2"	92 X 32 X 54"	26" / 32"	5" / 4"	660 lbs
B886-2000	2000 lbs	86"	2-1/2"	104 X 32 X 54"	26" / 32"	5" / 4"	680 lbs
BT800 Series - 20" Load Center							
BT894-1500	1500 lbs	94"	2-1/2"	119/74 X 38 X 55"	32" / 38"	5" / 4"	860 lbs
BT8107-1500	1500 lbs	107"	2-1/2"	133/81 X 38 X 55"	32" / 38"	5" / 4"	920 lbs
BT8127-1500	1500 lbs	127"	2-1/2"	154/93 X 38 X 55"	32" / 38"	5" / 4"	970 lbs
BT894-2000	2000 lbs	94"	2-1/2"	119/74 X 38 X 55"	32" / 38"	5" / 4"	880 lbs
BT8107-2000	2000 lbs	107"	2-1/2"	113/81 X 38 X 55"	32" / 38"	5" / 4"	930 lbs
BT8127-2000	2000 lbs	127"	2-1/2"	154/92 X 38 X 55"	32" / 38"	5" / 4"	980 lbs

Units over 93" in height will be shipped in the horizontal position.

Features

- 1500 - 2000 lb capacity
- 20" load center
- Lifting heights - 62" through 127"
- 1" thick x 3" wide x 30" long adjustable solid steel forks on 1500 lb B800 series
- 1-1/2" thick x 3" wide x 30" long adjustable solid steel forks on BT800 & 2000 lb B800 series
- Forks adjust from 6-1/2" to 26-1/2" O.D. on B800 series
- 15-1/2" high fork backs on 1500 lb units
- 15" high fork backs on 2000 lb units
- 14" high fork backs on BT series units
- Fixed and telescopic mast
- Turning radius with 40" load:
 - 85" aisle for B800 series
 - 87" aisle for BT800 series
 (Allows for 12" of operator clearance)
- Hand-operated floor lock
- Flow control valve for smooth lowering
- Lifting speed 5" per second
- Fixed base
- Heavy-duty 12V battery
- Custom micro-processor charger
- Optional fifth wheel for greater mobility
- Dual leaf-type chains with 8250 lb yield point
- High-impact, floor-saving phenolic load wheels

Distributed By: Custom Equipment Company

866-333-0728 919-847-5765 fax

tom@custommhs.com

www.custommhs.com

Presto LIFTS